

START FLOOD IP65 2000LM 840 BLACK  
0050174



Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2000 lm, 17 W, 118 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 108 x 23 mm (L x W x H). Weight: 0.26 kg.


Product Overview

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | START FLOOD IP65 2000LM 840 BLACK |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Floor standing                    |
| General application               | Retail                            |
| ETIM Class                        | EC001744                          |
| Fixture luminous flux (lm)        | 2000                              |
| Luminaire efficacy (lm/W)         | 118                               |
| Correlated colour temperature (k) | 4000                              |
| Light colour                      | Neutral White                     |
| CRI (Ra)                          | 80                                |
| Colour Variation Initial (SDCM)   | 5                                 |
| Beam Angle (°)                    | 110                               |
| Photobiological Risk Group        | RG1                               |
| Total power consumption (W)       | 17                                |
| Electrical protection             | Class I                           |
| Control gear type                 | Not required                      |

START FLOOD IP65 2000LM 840 BLACK  
0050174


|                    |               |
|--------------------|---------------|
| Dimmable           | No            |
| Housing colour     | Black         |
| IP rating          | IP65          |
| IK rating          | IK06          |
| Product EAN number | 5410288501741 |
| Warranty           | 3 years       |
| Dimming method     | N/A           |

Photometry

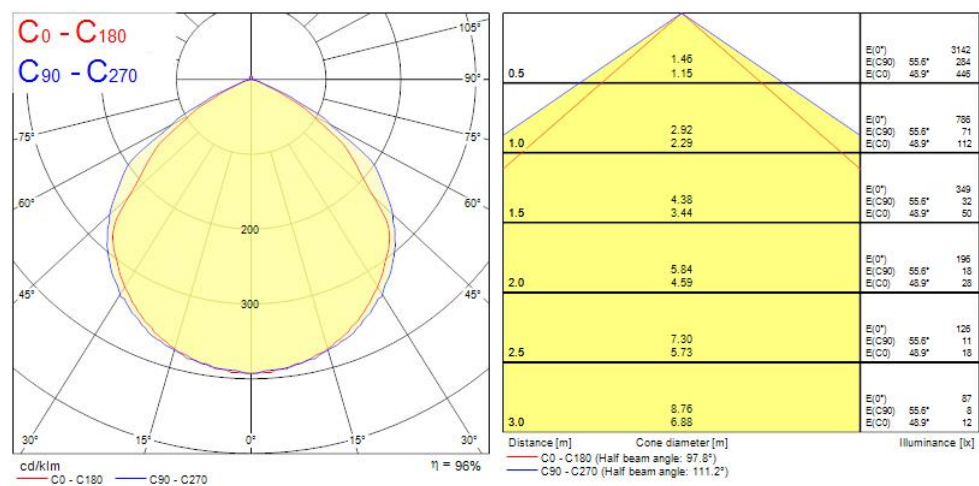

START FLOOD IP65 2000LM 840 BLACK  
0050174

Technical drawings

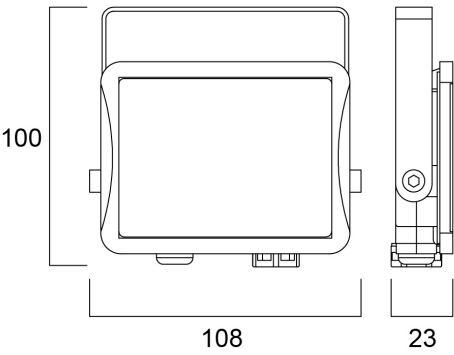

Data table

GENERAL DATA

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Product name                     | START FLOOD IP65 2000LM 840 BLACK |
| Technology                       | LED                               |
| Cap/Base                         | N/A                               |
| Housing                          | Aluminium                         |
| Mount                            | Floor standing                    |
| General application              | Retail                            |
| Operating temperature range (°C) | -20°C...+40°C                     |
| ETIM Class                       | EC001744                          |
| Warranty                         | 3 years                           |

OPTICAL DATA

|                                   |               |
|-----------------------------------|---------------|
| Fixture luminous flux (lm)        | 2000          |
| Luminaire efficacy (lm/W)         | 118           |
| Correlated colour temperature (k) | 4000          |
| Light colour                      | Neutral White |
| CRI (Ra)                          | 80            |

## START FLOOD IP65 2000LM 840 BLACK 0050174

|                                 |      |
|---------------------------------|------|
| Colour Variation Initial (SDCM) | 5    |
| Beam Angle (°)                  | 110  |
| Distribution type               | None |
| Photobiological Risk Group      | RG1  |

### ELECTRICAL DATA

|                                                                       |              |
|-----------------------------------------------------------------------|--------------|
| Total power consumption (W)                                           | 17           |
| Current (A)                                                           | 0.07         |
| Primary Supply/Product voltage - min (V)                              | 220.0        |
| Primary Supply/Product voltage - max (V)                              | 240.0        |
| Lamp power factor                                                     | 0.9          |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x % | 20           |
| Electrical protection                                                 | Class I      |
| Control gear required                                                 | No           |
| Control gear type                                                     | Not required |
| No. Of switching cycles before premature failures                     | >15000       |
| Dimmable                                                              | No           |
| Dimming method                                                        | N/A          |
| Drive current (mA)                                                    | 73           |
| Inrush Current (A)                                                    | 1            |
| Inrush Duration ( $\mu$ s)                                            | 100          |
| Energy Efficiency Class (A->G) of contained light source              | E            |
| Nominal Frequency (Hz)                                                | 50/60Hz      |
| Max. products per 10A C Breaker                                       | 74           |
| Max. products per 16A C Breaker                                       | 121          |
| Max. products per 16A B Breaker                                       | 71           |
| Connectable conductor cross section - Min (mm <sup>2</sup> )          | 1            |
| Connectable conductor cross section - Max (mm <sup>2</sup> )          | 1            |

### LIFETIME DATA

## START FLOOD IP65 2000LM 840 BLACK 0050174

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 90000 |
| Lifespan L80 B10 | 50000 |

### PHYSICAL DATA

|                             |                |
|-----------------------------|----------------|
| Housing colour              | Black          |
| IP rating                   | IP65           |
| IK rating                   | IK06           |
| Diffuser finish             | Transparent    |
| Diffuser material           | Glass          |
| Reflector finish            | Not Applicable |
| Nominal Product Length (mm) | 100            |
| Nominal Product Width (mm)  | 108            |
| Nominal Product Height (mm) | 23             |
| Weight (kg)                 | 0.26           |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288501741  |
| Packaging single length / height (cm) | 13.0           |
| Packaging single width (cm)           | 5.5            |
| Packaging single depth (cm)           | 15.5           |
| DUN14 (inner)                         | 15410288501748 |
| Units per outer package               | 6              |
| Packaging outer length / height (cm)  | 36.0           |
| Packaging outer width (cm)            | 14.5           |
| Packaging outer depth (cm)            | 17.5           |

### SAFETY DATA

|                                     |        |
|-------------------------------------|--------|
| Glow Wire Test (°C)                 | 650    |
| Optimal operating condition (°C)    | -20-40 |
| Special purpose lamp                | No     |
| Dry applications use only           | No     |
| Suitable for household illumination | No     |