

AREUM SUSPENDED 1500 D/I 4000K DALI ALU  
0042955




Features

• AREUM SUSPENDED 1500 D/I 4000K DALI ALU is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1500mm, width 300mm. White aluminium RAL9006 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. Low flicker (<5%) DALI dimmable driver. Luminous flux: 7000lm, Power consumption: 56W. Luminaire efficacy: 125lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

Product Overview

|                   |                             |
|-------------------|-----------------------------|
| Cap/Base          | N/A                         |
| Control gear type | LED driver constant current |

Photometry

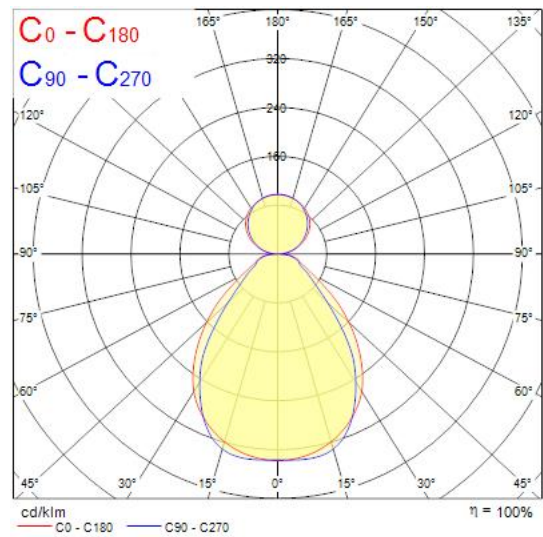

Technical drawings

