




Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 3000K, CRI80, Non-dimmable, 20800lm, 150W, 139lm/W, Asymmetrical Wide beam, 100.000hrs L80B50 lifespan, 404 x 313 x 73mm (LxWxD) dimensions, 3.7kg weight, RAL9017 Traffic Black color.

Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

Photometry

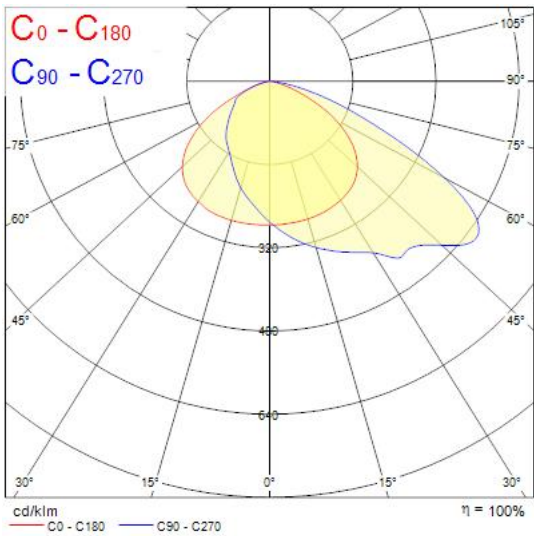

Technical drawings

