

Insaver HO Topper LED II 205 RO 21W NW  
3033943



Features

- IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.


Product Overview

|                                   |                                        |
|-----------------------------------|----------------------------------------|
| Product name                      | Insaver HO Topper LED II 205 RO 21W NW |
| Technology                        | LED                                    |
| Cap/Base                          | N/A                                    |
| Housing                           | Aluminium                              |
| Mount                             | Ceiling recessed mounting              |
| Environment                       | Interior                               |
| General application               | Hospitality                            |
| ETIM Class                        | EC001744                               |
| E-number SE                       | 7465649                                |
| Fixture luminous flux (lm)        | 2150                                   |
| Luminaire efficacy (lm/W)         | 102                                    |
| LOR (%)                           | 100                                    |
| Correlated colour temperature (k) | 4000                                   |
| Light colour                      | Neutral White                          |
| CRI (Ra)                          | 80                                     |
| Colour Variation Initial (SDCM)   | 3                                      |
| Beam Angle (°)                    | 74                                     |
| Glare control                     | < 24                                   |
| Photobiological Risk Group        | RG0                                    |
| Total power consumption (W)       | 21                                     |

## Insaver HO Topper LED II 205 RO 21W NW 3033943

|                       |                             |
|-----------------------|-----------------------------|
| Electrical protection | Class II                    |
| Control gear type     | LED driver constant current |
| Dimmable              | No                          |
| LED Flickering Rate   | Ultra low (5% or less)      |
| Housing colour        | RAL9010                     |
| IP rating             | IP44/20                     |
| IK rating             | IK07                        |
| Product EAN number    | 8711971339434               |
| Warranty              | 5 years                     |
| Dimming method        | N/A                         |

### Photometry

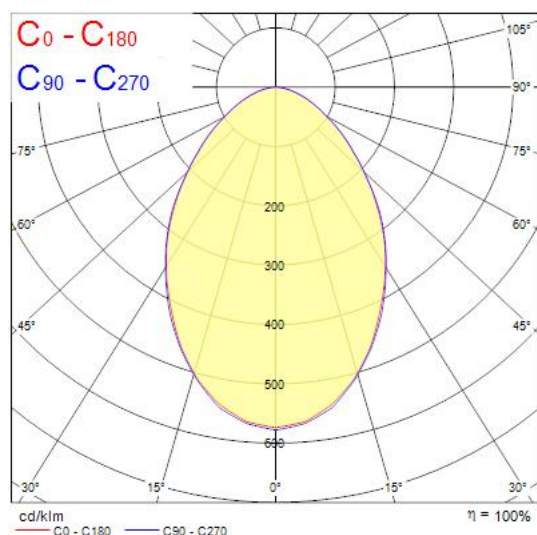

### Technical drawings

