


Concord

Solstice 150 3100lm 940 DALI
2070419

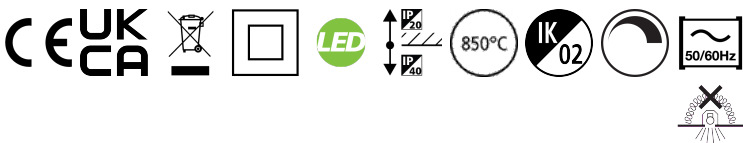

Features

- Solstice 150 3100lm 940 DALI

Product Overview


Product name	Solstice 150 3100lm 940 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	129
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	24

Concord

Solstice 150 3100lm 940 DALI
2070419

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768704194
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)

Photometry

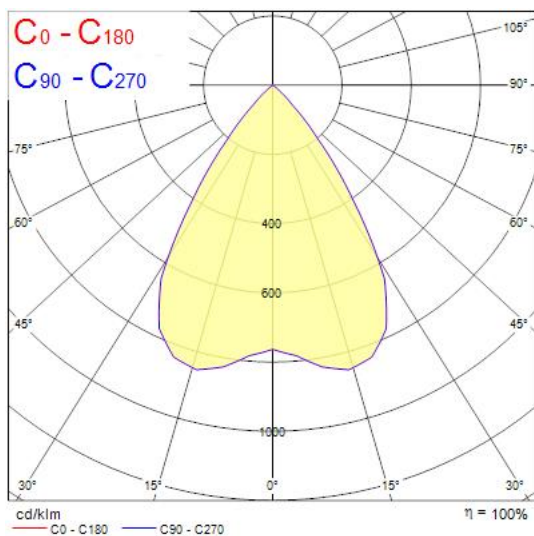

Technical drawings

