

INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP
0084030



Features

- INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP is the recessed housing frame to use with RefLED GU10 spotlight lamp Ø50mm - GU10 spotlight not included. Aluminium body, round bezel ring in white finish, IP44 degree of protection, class II, Suitable for outdoor environment


Product Overview

Product name	INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP
Technology	Accessory
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	Fixture without Lightsource
Environment	Outdoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4279661
Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class II
Control gear type	Not required

INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP
0084030

Dimmable	No
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	5410288840307
Warranty	3 years
Dimming method	N/A

Technical drawings

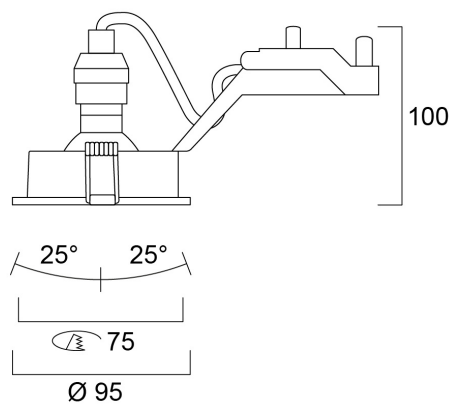

Data table

GENERAL DATA

Product name	INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP
Technology	Accessory
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Outdoor
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C

INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP 0084030

ETIM Class	EC001744
E-number FI	4279661
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Light source included	Fixture without Lightsource
Total power consumption (W)	0.1
Current (A)	0.001
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	1
Electrical protection	Class II
Control gear required	No
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30
Connectable conductor cross section - Max (mm ²)	1.5

PHYSICAL DATA

Housing colour	White
----------------	-------

INSET TREND 75 SW IP44 OUTDOOR WH NO-LMP 0084030

IP rating	IP44/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	100
Nominal Product Diameter (mm)	95
Built-in diameter (mm)	75
Weight (kg)	0.175
Recessed Depth (mm)	100

PACKAGING

Product EAN number	5410288840307
Packaging single length / height (cm)	13.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	15410288840304
Units per outer package	30
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	28.0

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No