

PIXO LINE 1500 90D BEAM 840 BLACK
0007822



Features

• Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90° Textured black finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx 37mm


Product Overview

Product name	PIXO LINE 1500 90D BEAM 840 BLACK
Technology	LED
Cap/Base	N/A
Mount	Track mounting
General application	Retail, Hospitality, Museums & Galleries, Office
ETIM Class	EC000996
E-number FI	4279403
Fixture luminous flux (lm)	7400
Luminaire efficacy (lm/W)	148

PIXO LINE 1500 90D BEAM 840 BLACK
0007822

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 28
Photobiological Risk Group	Not applicable
Total power consumption (W)	50
Electrical protection	Class III
Dimmable	No
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288078229
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	7400

Photometry

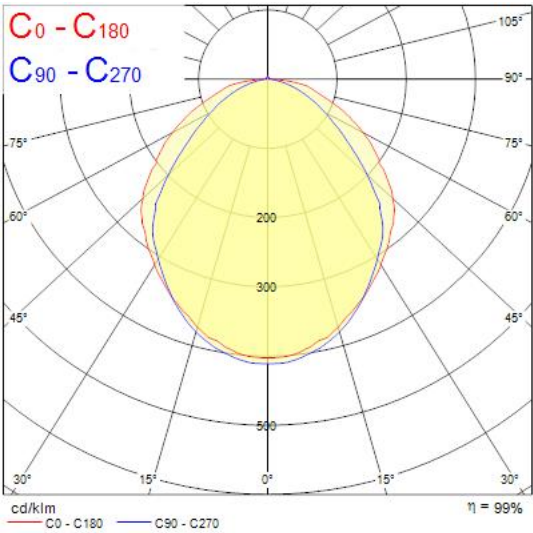

Technical drawings

