



Features

• DELTAWING 1200 4K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 35W system power, 4,600lm flux and 131lm/W efficacy, CRi (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (20W 2700lm, 25W 3350lm, 30W 4000lm, 35W 4600lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.

Product Overview


Product name	DELTAWING 1200 4K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4279327
Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	131
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35

DELTAWING 1200 4K

0042930

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429304
Warranty	5 years
Dimming method	N/A

Photometry

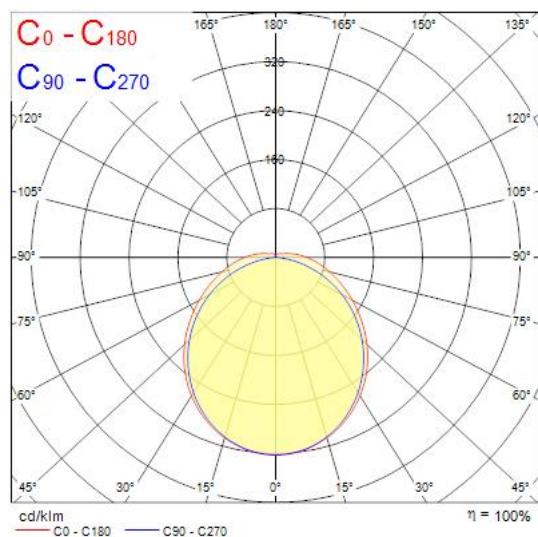

Technical drawings

