


# Concord

## Solstice 150 1500lm 930 DALI Double Wall Washer 2070175

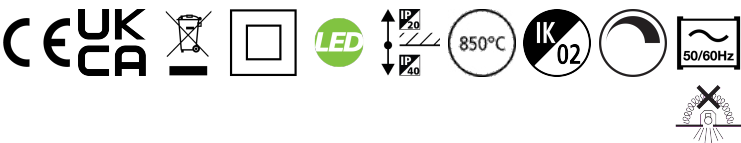

### Features

- The Solstice 150 1500lm 930 DALI Double Wall Washer is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.


### Product Overview

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| Product name                      | Solstice 150 1500lm 930 DALI Double Wall Washer |
| Technology                        | LED                                             |
| Cap/Base                          | N/A                                             |
| Housing                           | Aluminium                                       |
| Mount                             | Ceiling recessed mounting                       |
| General application               | Hospitality, Office, Retail                     |
| ETIM Class                        | EC001744                                        |
| E-number FI                       | 4170383                                         |
| Fixture luminous flux (lm)        | 1500                                            |
| Luminous flux (lm)                | 1500                                            |
| Luminaire efficacy (lm/W)         | 100                                             |
| LOR (%)                           | 100                                             |
| Correlated colour temperature (k) | 3000                                            |
| Light colour                      | Warm White                                      |
| CRI (Ra)                          | 90                                              |
| Colour Consistency (SDCM)         | 3                                               |
| Colour Variation Initial (SDCM)   | 3                                               |
| Beam Angle (°)                    | 70                                              |
| Glare control                     | < 19                                            |

## Solstice 150 1500lm 930 DALI Double Wall Washer 2070175

|                             |                                        |
|-----------------------------|----------------------------------------|
| Photobiological Risk Group  | RG1                                    |
| Total power consumption (W) | 15                                     |
| Electrical protection       | Class II                               |
| Control gear type           | LED driver constant current            |
| Dimmable                    | Yes                                    |
| Minimum dimming level (%)   | 1                                      |
| LED Flickering Rate         | Ultra low (5% or less)                 |
| Housing colour              | RAL9016                                |
| IP rating                   | IP40/20                                |
| IK rating                   | IK02                                   |
| Product EAN number          | 5025768701759                          |
| Warranty                    | 5 years                                |
| Dimming method              | DALI, DALI-2, Switch-dim (mains-rated) |
| Useful luminous flux (#use) | 1500                                   |

### Photometry

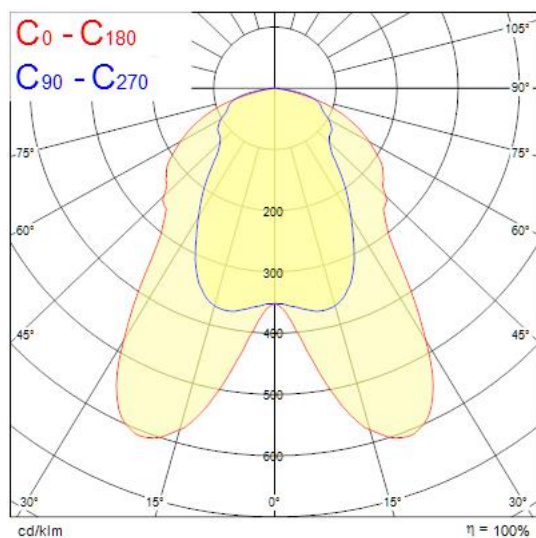

### Technical drawings

