

Features

• Insaver is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.


Product Overview

Product name	INSAVER UGR19 IP65 150 1200LM 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4579607
Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class II
Control gear type	LED driver constant current

INSAVER UGR19 IP65 150 1200LM 840
0030529


Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP65
IK rating	IK03
Product EAN number	5410288305295
Warranty	5 years
Dimming method	N/A

Photometry

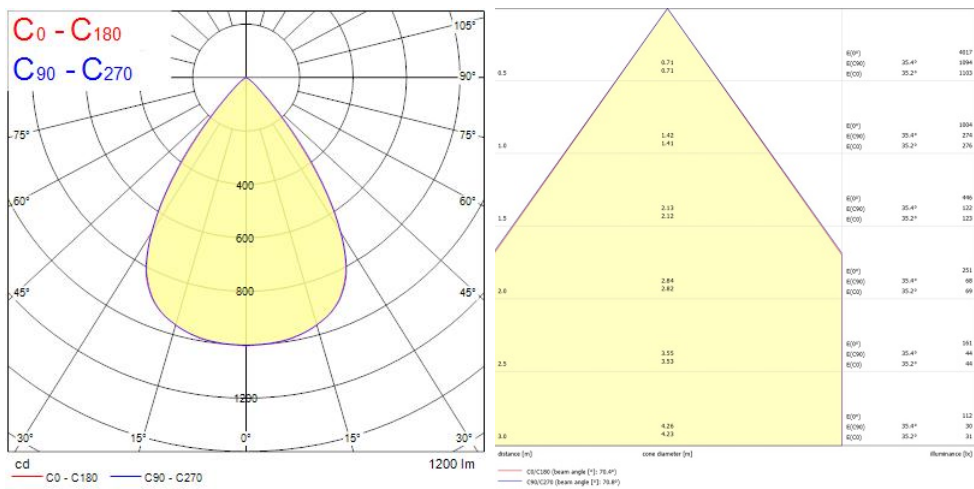

INSAVER UGR19 IP65 150 1200LM 840
0030529

Technical drawings

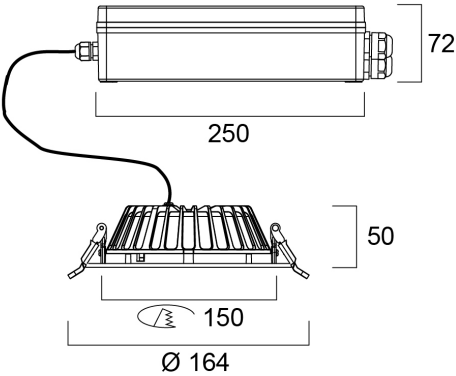

Data table

GENERAL DATA

Product name	INSAVER UGR19 IP65 150 1200LM 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579607
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White

INSAVER UGR19 IP65 150 1200LM 840 0030529

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	9.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	15
Inrush Duration (µs)	104
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	66
Max. products per 16A C Breaker	96
Max. products per 16A B Breaker	77
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

LIFETIME DATA

INSAVER UGR19 IP65 150 1200LM 840 0030529

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B50	50000
Lifespan L90 B20	43000
Lifespan L90 B10	39000

PHYSICAL DATA

Housing colour	RAL9010
IP rating	IP65
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	50
Nominal Product Diameter (mm)	165
Built-in diameter (mm)	150
Weight (kg)	0.811

PACKAGING

Product EAN number	5410288305295
Packaging single length / height (cm)	33.0
Packaging single width (cm)	26.5
Packaging single depth (cm)	11.0
DUN14 (inner)	15410288305292
Units per outer package	8
Packaging outer length / height (cm)	55.0
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	46.0

SAFETY DATA



INSAVER UGR19 IP65 150 1200LM 840
0030529

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No