

Features

- Insaвер is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.


Product Overview

Product name	INSAVER UGR19 IP65 150 1200LM 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4579607
Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class II
Control gear type	LED driver constant current

INSAVER UGR19 IP65 150 1200LM 840 0030529

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP65
IK rating	IK03
Product EAN number	5410288305295
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1200

Photometry

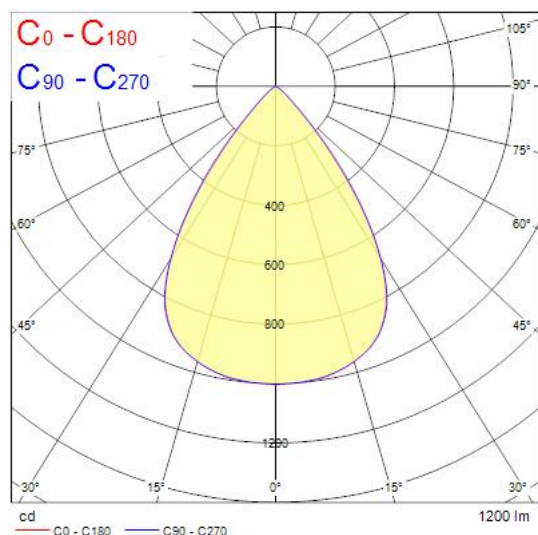

Technical drawings

