
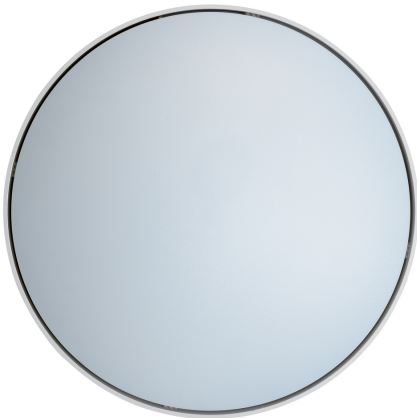


GIOTTO 335 3000K SURFACE
3034797

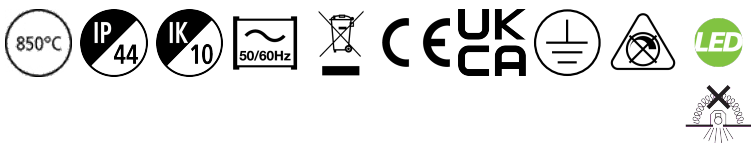

Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2225lm, 20.3W, 110lm/W, 3000K, CRI 80, non-dimmable, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.


Product Overview

Product name	GIOTTO 335 3000K SURFACE
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
E-number FI	4270240
Fixture luminous flux (lm)	2225
Luminaire efficacy (lm/W)	110
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120

GIOTTO 335 3000K SURFACE 3034797

Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	20.3
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347972
Warranty	5 years
Dimming method	N/A
Colour Code	830

Photometry

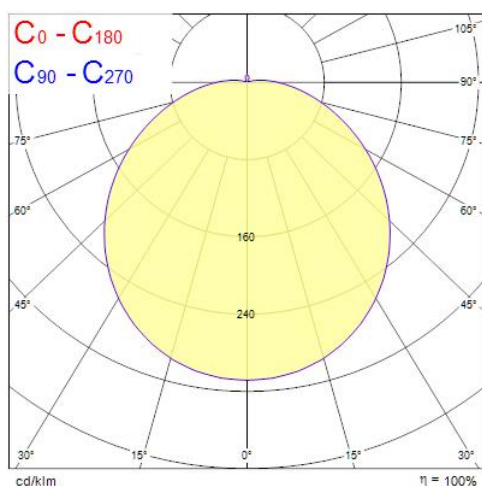


0.5	1.58	E(0°) E(C0)	57.6°	2745 211
1.0	3.15	E(0°) E(C0)	57.6°	686 53
1.5	4.73	E(0°) E(C0)	57.6°	305 23
2.0	6.30	E(0°) E(C0)	57.6°	172 13
2.5	7.88	E(0°) E(C0)	57.6°	110 8
3.0	9.45	E(0°) E(C0)	57.6°	76 6

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 115.2°)

GIOTTO 335 3000K SURFACE 3034797

Technical drawings

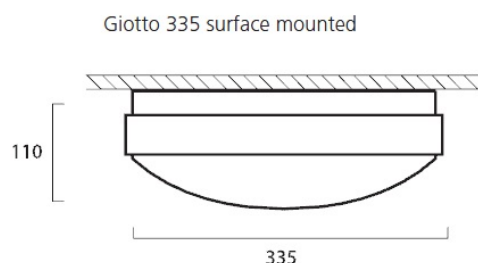

Data table

GENERAL DATA

Product name	GIOTTO 335 3000K SURFACE
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270240
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2225
Luminaire efficacy (lm/W)	110
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White

GIOTTO 335 3000K SURFACE 3034797

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80

ELECTRICAL DATA

Total power consumption (W)	20.3
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.92
THD (at 230 V, 50 Hz, full load, at 100% dimming level) < xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	40
Inrush Duration (µs)	400
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	30
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	18

GIOTTO 335 3000K SURFACE 3034797

Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L90 B50	74500

PHYSICAL DATA

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	335
Built-in diameter (mm)	335
Weight (kg)	1.2

PACKAGING

Product EAN number	8711971347972
Packaging single length / height (cm)	35.7
Packaging single width (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (inner)	08711971347972
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

SAFETY DATA



GIOTTO 335 3000K SURFACE
3034797

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-25-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No