

START SPOT IP65 PIR 670-1050LM 3CCT WHT
0005191



Features

• START SPOT IP65 PIR 670-1050LM 3CCT WHT is a universal spotlight offering multiple PIR sensor setting options and three adjustable colour temperature options (3 CCT 2700K-3000K-4000K) for easy customization to suit the need of the user. White finish, fixed, 2 wattage switch on the driver (6W-10W) as standard with 670lm & 1050lm for 4000K , 50° degree beam angle, low profile 31.7mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68mm cutout. Additional white or black non PIR bezel can be ordered as accessory.


Product Overview

Product name	START SPOT IP65 PIR 670-1050LM 3CCT WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1050
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

START SPOT IP65 PIR 670-1050LM 3CCT WHT
0005191

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP65/20
IK rating	IK02
Product EAN number	5410288051918
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1050

Photometry

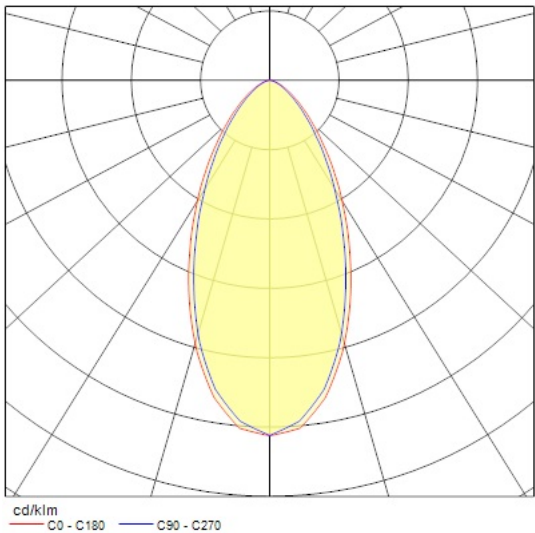

Technical drawings

