


OTAO LINEAR FAST CONNECTOR
0041820



Features


- Mechanical connectorfor Otao Linear luminaires to build continuous line, 1pce per pack.

Product Overview

Product name	OTAO LINEAR FAST CONNECTOR
Technology	LED (3 SDCM)
Housing	Steel
Mount	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
General application	Office, Education
ETIM Class	EC002557
E-number FI	4170606
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Housing colour	Nickel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288418209
Warranty	5 years

OTAO LINEAR FAST CONNECTOR
0041820

Technical drawings

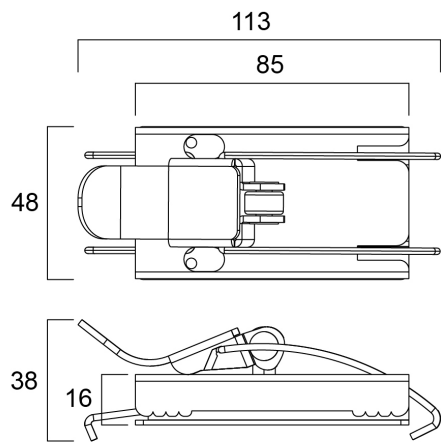

Data table

GENERAL DATA

Product name	OTAO LINEAR FAST CONNECTOR
Technology	LED (3 SDCM)
Type of accessory	Connector
Housing	Steel
Mount	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002557
E-number FI	4170606
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR FAST CONNECTOR 0041820

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Housing colour	Nickel
IP rating	IP20
IK rating	IK03
Weight (kg)	0.2

PACKAGING

Product EAN number	5410288418209
Packaging single length / height (cm)	13.7
Packaging single width (cm)	4.8
Packaging single depth (cm)	3.7
DUN14 (inner)	15410288418206
Units per outer package	50
Packaging outer length / height (cm)	29.5
Packaging outer width (cm)	20.5
Packaging outer depth (cm)	26.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No