


GIOTTO 305 3000K SURFACE DALI EMERGENCY  
3034793

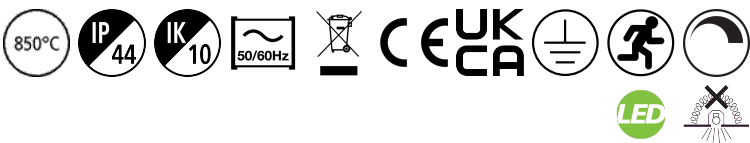

Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1625lm, 18W, 91lm/W, 3000K, CRI 80, DALI, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.


Product Overview

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| Product name                      | GIOTTO 305 3000K SURFACE DALI EMERGENCY         |
| Technology                        | LED                                             |
| Cap/Base                          | N/A                                             |
| Housing                           | PC Polycarbonate                                |
| Mount                             | Ceiling recessed mounting, Wall surface mounted |
| Environment                       | Indoor                                          |
| General application               | Hospitality, Logistics & Industry               |
| ETIM Class                        | EC002892                                        |
| Fixture luminous flux (lm)        | 1625                                            |
| Luminaire efficacy (lm/W)         | 91                                              |
| Correlated colour temperature (k) | 3000                                            |
| Light colour                      | Warm White                                      |
| CRI (Ra)                          | 80                                              |
| Colour Variation Initial (SDCM)   | 3                                               |
| Beam Angle (°)                    | 120                                             |
| Glare control                     | < 24                                            |
| Photobiological Risk Group        | RG0                                             |
| Luminous flux (emergency) (lm)    | 128                                             |
| Luminous flux (emergency) (lm)    | 128                                             |

## GIOTTO 305 3000K SURFACE DALI EMERGENCY 3034793

|                             |                             |
|-----------------------------|-----------------------------|
| Total power consumption (W) | 18                          |
| Electrical protection       | Class I                     |
| Control gear type           | LED driver constant current |
| Control gear mounting       | Integrated                  |
| Dimmable                    | Yes                         |
| Minimum dimming level (%)   | 1                           |
| LED Flickering Rate         | Ultra low (5% or less)      |
| Housing colour              | White                       |
| IP rating                   | IP44                        |
| IK rating                   | IK10                        |
| Product EAN number          | 8711971347934               |
| Warranty                    | 5 years                     |
| Dimming method              | DALI                        |
| Colour Code                 | 830                         |

### Photometry

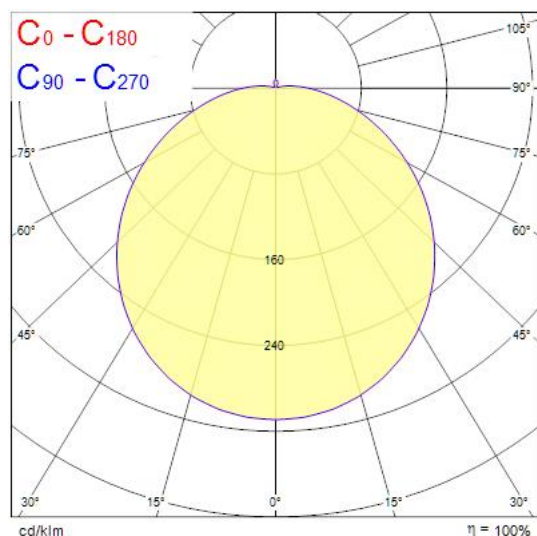

### Technical drawings

Giotto 305 surface mounted

