

START Downlight 220 2150lm 840 Surface
0030447



Features

- Surface mounted LED downlight with diameter size of 220mm. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 4000K, Driver Current: 600mA, CRI80, Non-dimmable LED driver, IP20, IK07, (HxW) 94x220mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 220 2150lm 840 Surface
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4279539
Fixture luminous flux (lm)	2150
Luminous flux (lm)	2150
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II

START Downlight 220 2150lm 840 Surface
0030447

Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP20
IK rating	IK07
Product EAN number	5410288304472
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2025

Photometry

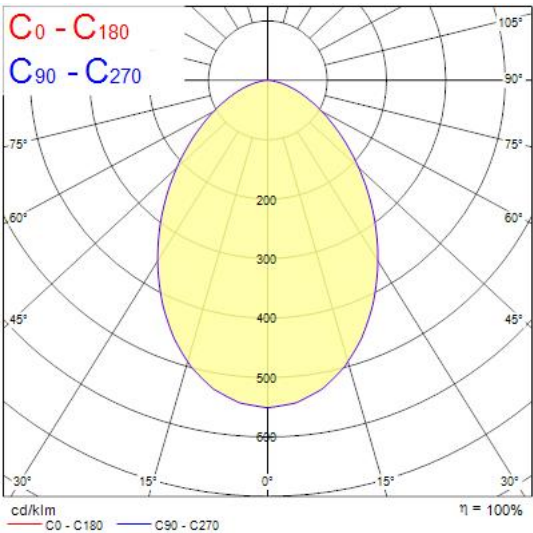

Technical drawings

