

Features

• Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyers. Body Size diameter 300mm. Besa mounting box compatible, hole distance 51 & 78mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (4000K: 6W 450lm, 9.3W 890lm, 13.5W 1400lm, 17.5W 1800lm). Efficacy up to 104lm/W. Supplied with integrated PIR (infra-red) sensor for automatic on-off presence control. Non-dimmable. IK03, IP54. Low maintenance with lifespan 120,000 hours L70:B50


Product Overview

Product name	START Surface IP54 PIR 450-1800lm 830/840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Hospitality, Museums & Galleries
ETIM Class	EC002892
E-number FI	4279507
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	103
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	17.5
Electrical protection	Class II

START Surface IP54 PIR 450-1800lm 830/840
0043407

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9003
IP rating	IP54
IK rating	IK03
Product EAN number	5410288434070
Warranty	5 years
Dimming method	N/A

Photometry

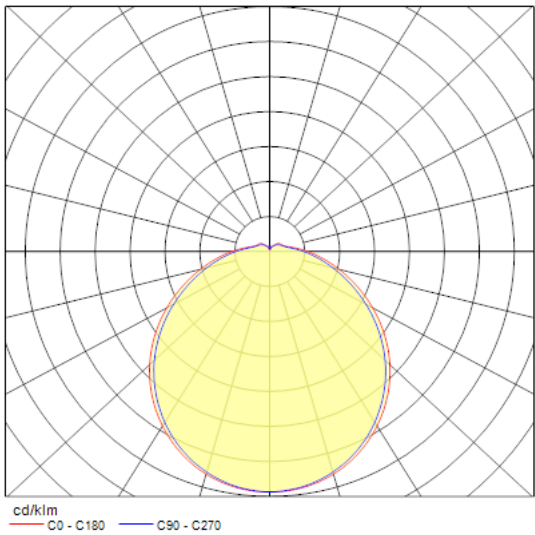

Technical drawings

