


START SPOT ALU 870LM 3CCT DIM IP65 WHT
0005187

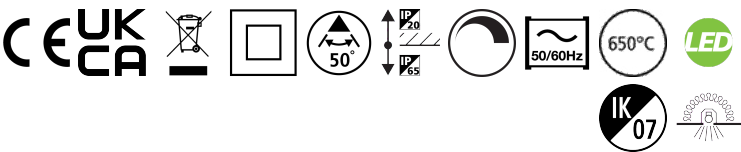

Features

- Integrated LED recessed spotlight, white bezel colour, white reflector, 50° degree beam angle, 3-CCT changeable 2700-3000-4000K, polycarbonate and aluminium body, low profile 62mm recessed depth, IP65 from the front, IK07, loop-in/loop-out terminals for fast wiring, 85mm bezel diameter, 68mm cutout, clear lens.


Product Overview

Product name	START SPOT ALU 870LM 3CCT DIM IP65 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	870
Luminaire efficacy (lm/W)	100
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	8.7
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL9016
IP rating	IP65/20
IK rating	IK07

START SPOT ALU 870LM 3CCT DIM IP65 WHT 0005187

Product EAN number	5410288051871
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	870

Photometry

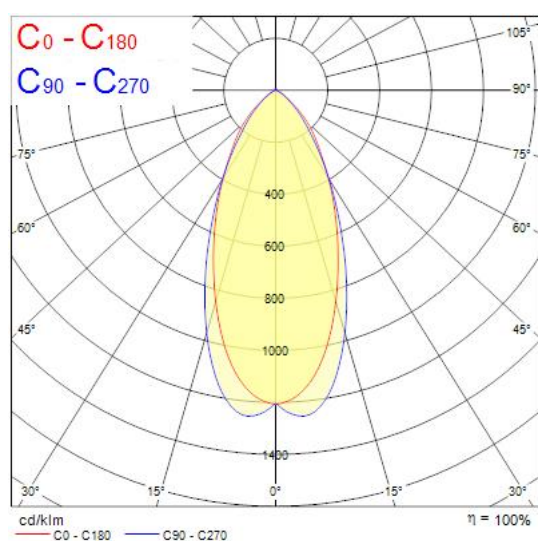

Technical drawings

