

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471



Features

- MC2-KIT 1.2M 4K DALIEM WHT PRIS LED luminaire, white RAL9016 finishing, direct distribution, suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 4000K neutral white, total system power: 19W, total fixture output: 2300lm, emergency output: 136lm, luminaire efficacy: 121lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, DALI dimmable, integral emergency: 3 hour maintained, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview



Product name	MC2 KIT 1.2M 4K DALIEM WHT PRIS
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001743
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	121
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	136
Luminous flux (emergency) (lm)	136
Total power consumption (W)	19
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5025768714711
Warranty	5 years
Dimming method	DALI

Photometry

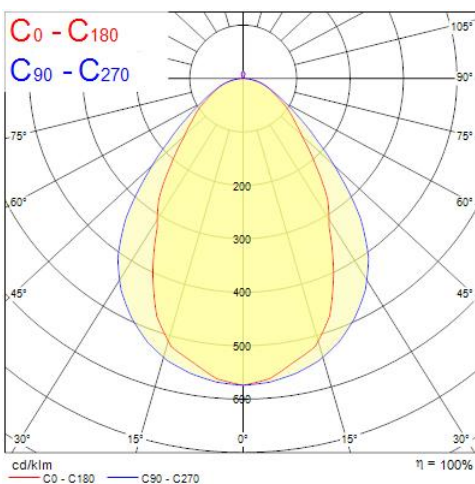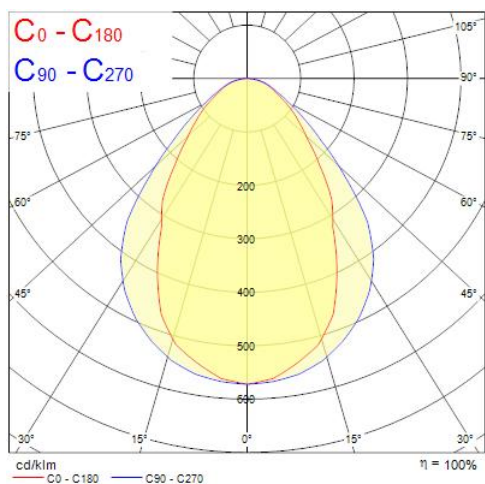


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.95 0.67	43.4°	33.8°	33.8°	533 1013 1511
1.0	1.89 1.34	43.4°	33.8°	33.8°	1316 253 378
1.5	2.84 2.01	43.4°	33.8°	33.8°	585 113 168
2.0	3.78 2.68	43.4°	33.8°	33.8°	329 63 94
2.5	4.73 3.35	43.4°	33.8°	33.8°	211 41 60
3.0	5.67 4.02	43.4°	33.8°	33.8°	146 28 42



Distance [m] Cone diameter [m] Illuminance [lx]
 — C₀ - C₁₈₀ (Half beam angle: 67.6°)
 — C₉₀ - C₂₇₀ (Half beam angle: 66.8°)

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471

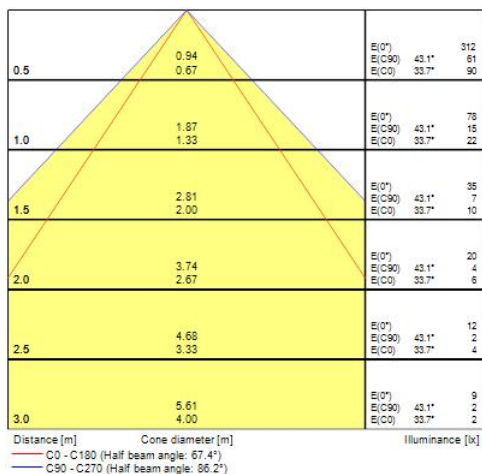

Technical drawings

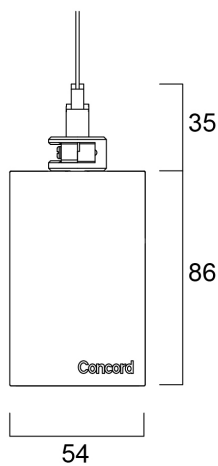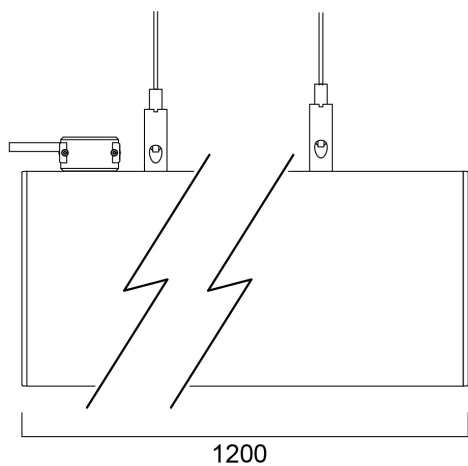

Data table

GENERAL DATA

Product name	MC2 KIT 1.2M 4K DALIEM WHT PRIS
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471

Mount	Suspended
General application	Education, Hospitality, Office, Retail
Operating temperature range (°C)	1°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	121
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Luminous Intensity (cd)	1316
Distribution type	Symmetric
Glare control	< 21
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	136
Luminous flux (emergency) (lm)	136
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	19
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	6.1
Electrical protection	Class I
Control gear required	No

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471

Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Min. drive current (mA)	350
Max. drive current (mA)	1050
Drive current - Range (mA)	350mA / 1050mA
Inrush Current (A)	40
Inrush Duration (µs)	178
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	15
Max. products per 13A C Breaker	20
Max. products per 16A C Breaker	23
Max. products per 20A C Breaker	30
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	12
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	18
Connectable conductor cross section - Max (mm²)	1.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	92500
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate

Concord

MC2 KIT 1.2M 4K DALIEM WHT PRIS 2071471

Reflector finish	Not Applicable
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	3.2

PACKAGING

Product EAN number	5025768714711
Packaging single length / height (cm)	121.0
Packaging single width (cm)	11.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768714711
Units per outer package	1
Packaging outer length / height (cm)	121.0
Packaging outer width (cm)	11.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No