

OTAO LINEAR CEILING ROSE BK 5-PIN
0040818



Features

- Ceiling rose incl 2m 5-pin power cable for OTAO on-off and DALI luminaires. RAL9011 (black) finishing.




Product Overview

Product name	OTAO LINEAR CEILING ROSE BK 5-PIN
Technology	LED (3 SDCM)
Housing	Steel
Mount	Suspended
General application	Education, Office
ETIM Class	EC002557
E-number FI	4170668
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Electrical protection	Class III
Housing colour	RAL9011
IP rating	OTHER
IK rating	IK03
Product EAN number	5410288408187
Warranty	5 years

OTAO LINEAR CEILING ROSE BK 5-PIN
0040818

Technical drawings

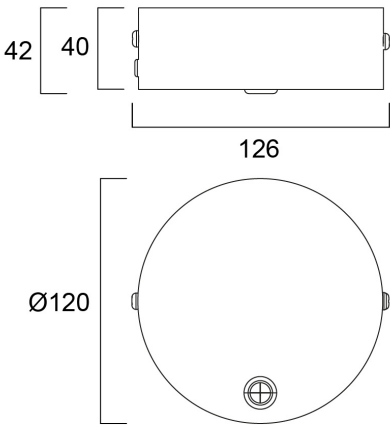

Data table

GENERAL DATA

Product name	OTAO LINEAR CEILING ROSE BK 5-PIN
Technology	LED (3 SDCM)
Type of accessory	Ceiling cup
Housing	Steel
Mount	Suspended
General application	Education, Office
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002557
E-number FI	4170668
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR CEILING ROSE BK 5-PIN 0040818

ELECTRICAL DATA

Electrical protection	Class III
Control gear required	No

PHYSICAL DATA

Housing colour	RAL9011
IP rating	OTHER
IK rating	IK03
Diffuser finish	Other
Nominal Product Diameter (mm)	120
Weight (kg)	0.3

PACKAGING

Product EAN number	5410288408187
Packaging single length / height (cm)	13.9
Packaging single width (cm)	12.3
Packaging single depth (cm)	8.8
DUN14 (inner)	15410288408184
Units per outer package	20
Packaging outer length / height (cm)	64.3
Packaging outer width (cm)	29.7
Packaging outer depth (cm)	19.4

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No