


Concord

MYRIAD IP65 4000K DALI WHITE

2049541



Features

- MYRIAD IP65 4000K DALI WHITE




Product Overview

Product name	MYRIAD IP65 4000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462016
E-number Norway	3290238
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II

MYRIAD IP65 4000K DALI WHITE 2049541

Control gear type	Electronic ballast
Control gear mounting	Integral
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495412
Warranty	5 years
Dimming method	DALI

Photometry

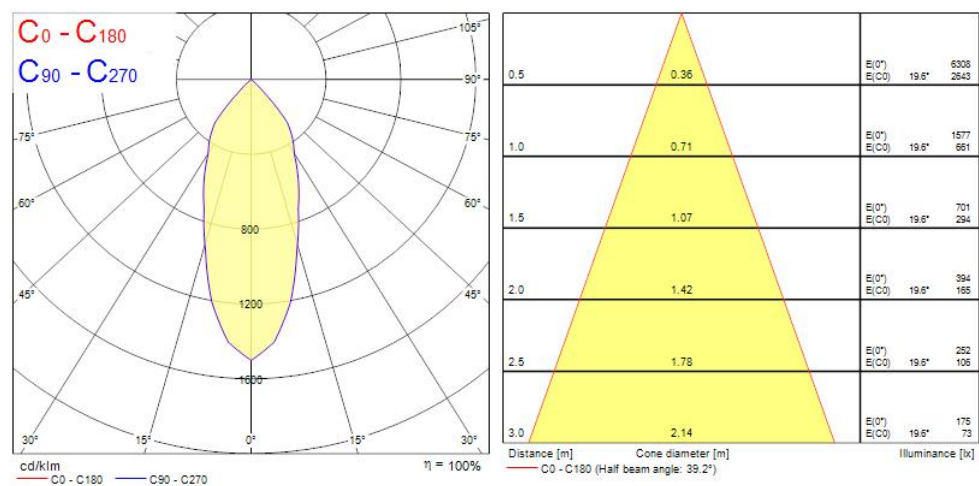


Concord

MYRIAD IP65 4000K DALI WHITE

2049541

Technical drawings

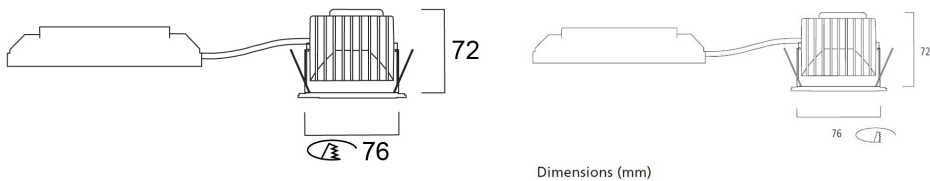

Data table

GENERAL DATA

Product name	MYRIAD IP65 4000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462016
E-number Norway	3290238
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	4000

MYRIAD IP65 4000K DALI WHITE 2049541

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimming method	DALI
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Weight (kg)	0.39

Concord

MYRIAD IP65 4000K DALI WHITE
2049541

Recessed Depth (mm)	72
---------------------	----

PACKAGING

Product EAN number	5025768495412
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No