



Features

• Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 38° medium beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1885lm, luminaire efficacy: 90lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, DALI dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit DALI track adaptor, suitable for Concord Lytespan 3+DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !


Product Overview

Product name	BEACON 93CRI 4K MEDIUM BEAM L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White

BEACON 93CRI 4K MEDIUM BEAM L3+DALI WHITE 2059645


CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596454
Warranty	5 years
Dimming method	DALI

Photometry

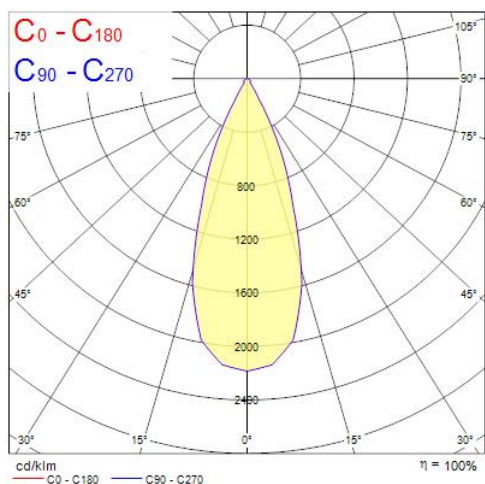

0.5	0.35	E(0°) E(C0)	19.1° 19.1°	16469 7009
1.0	0.69	E(0°) E(C0)	19.1° 19.1°	4117 1752
1.5	1.04	E(0°) E(C0)	19.1° 19.1°	1830 779
2.0	1.39	E(0°) E(C0)	19.1° 19.1°	1029 438
2.5	1.73	E(0°) E(C0)	19.1° 19.1°	669 280
3.0	2.08	E(0°) E(C0)	19.1° 19.1°	457 195

Technical drawings

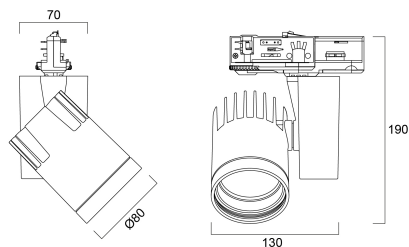

Data table

GENERAL DATA

Product name	BEACON 93CRI 4K MEDIUM BEAM L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3

BEACON 93CRI 4K MEDIUM BEAM L3+DALI WHITE 2059645

Adjustable chromaticity	N
Beam Angle (°)	38
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	500
Inrush Current (A)	5
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	85

LIFETIME DATA

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

BEACON 93CRI 4K MEDIUM BEAM L3+DALI WHITE 2059645

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Height (mm)	190
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

PACKAGING

Product EAN number	5025768596454
Packaging single length / height (cm)	16.0
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (inner)	05025768596454
Units per outer package	1
Packaging outer length / height (cm)	16.0
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	18.2

SAFETY DATA

Glow Wire Test (°C)	650
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No