



Features

• DELTAWING 1200 3K EM is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 38W system power, 4,200lm flux and 111lm/W efficacy, CRI (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, Constant Current (4-steps DIP switch) driver and 3hrs emergency with LiFePO4 battery, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

|                                   |                                                |
|-----------------------------------|------------------------------------------------|
| Product name                      | DELTAWING 1200 3K EM                           |
| Technology                        | LED (3 SDCM)                                   |
| Cap/Base                          | N/A                                            |
| Housing                           | PC Polycarbonate, Steel                        |
| Mount                             | Ceiling surface mounting, Wall surface mounted |
| General application               | Education, Logistics & Industry, Office        |
| ETIM Class                        | EC002892                                       |
| Fixture luminous flux (lm)        | 4200                                           |
| Luminaire efficacy (lm/W)         | 111                                            |
| Correlated colour temperature (k) | 3000                                           |
| Light colour                      | Warm White                                     |
| CRI (Ra)                          | 80                                             |
| Colour Variation Initial (SDCM)   | 3                                              |
| Beam Angle (°)                    | 120                                            |
| Photobiological Risk Group        | RG0                                            |
| Total power consumption (W)       | 38                                             |
| Electrical protection             | Class I                                        |
| Control gear type                 | LED driver constant current                    |

DELTAWING 1200 3K EM  
0042920

|                    |               |
|--------------------|---------------|
| Dimmable           | No            |
| Housing colour     | RAL9003       |
| IP rating          | IP44          |
| IK rating          | IK06          |
| Product EAN number | 5410288429205 |
| Warranty           | 5 years       |
| Dimming method     | N/A           |

Photometry

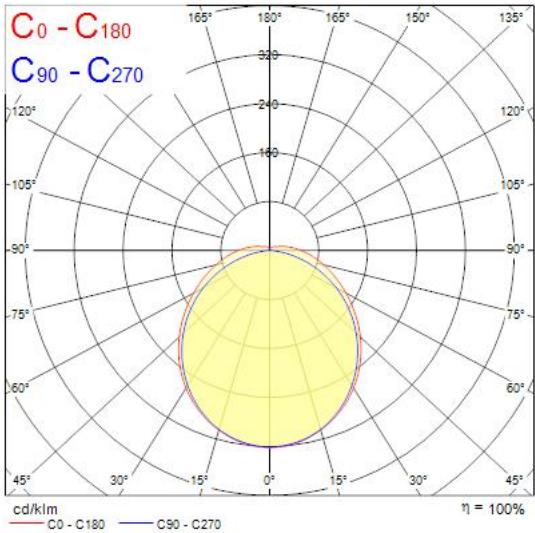

Technical drawings

