

START SURFACE IP66 1500LM 840 EM3 IK10 WHT
0049009



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 17W max. power consumption, 88lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated emergency, 3 hours, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1500LM 840 EM3 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current

START SURFACE IP66 1500LM 840 EM3 IK10 WHT
0049009


Control gear mounting	Integrated
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490090
Warranty	5 years
Dimming method	N/A
Colour Code	840

Photometry

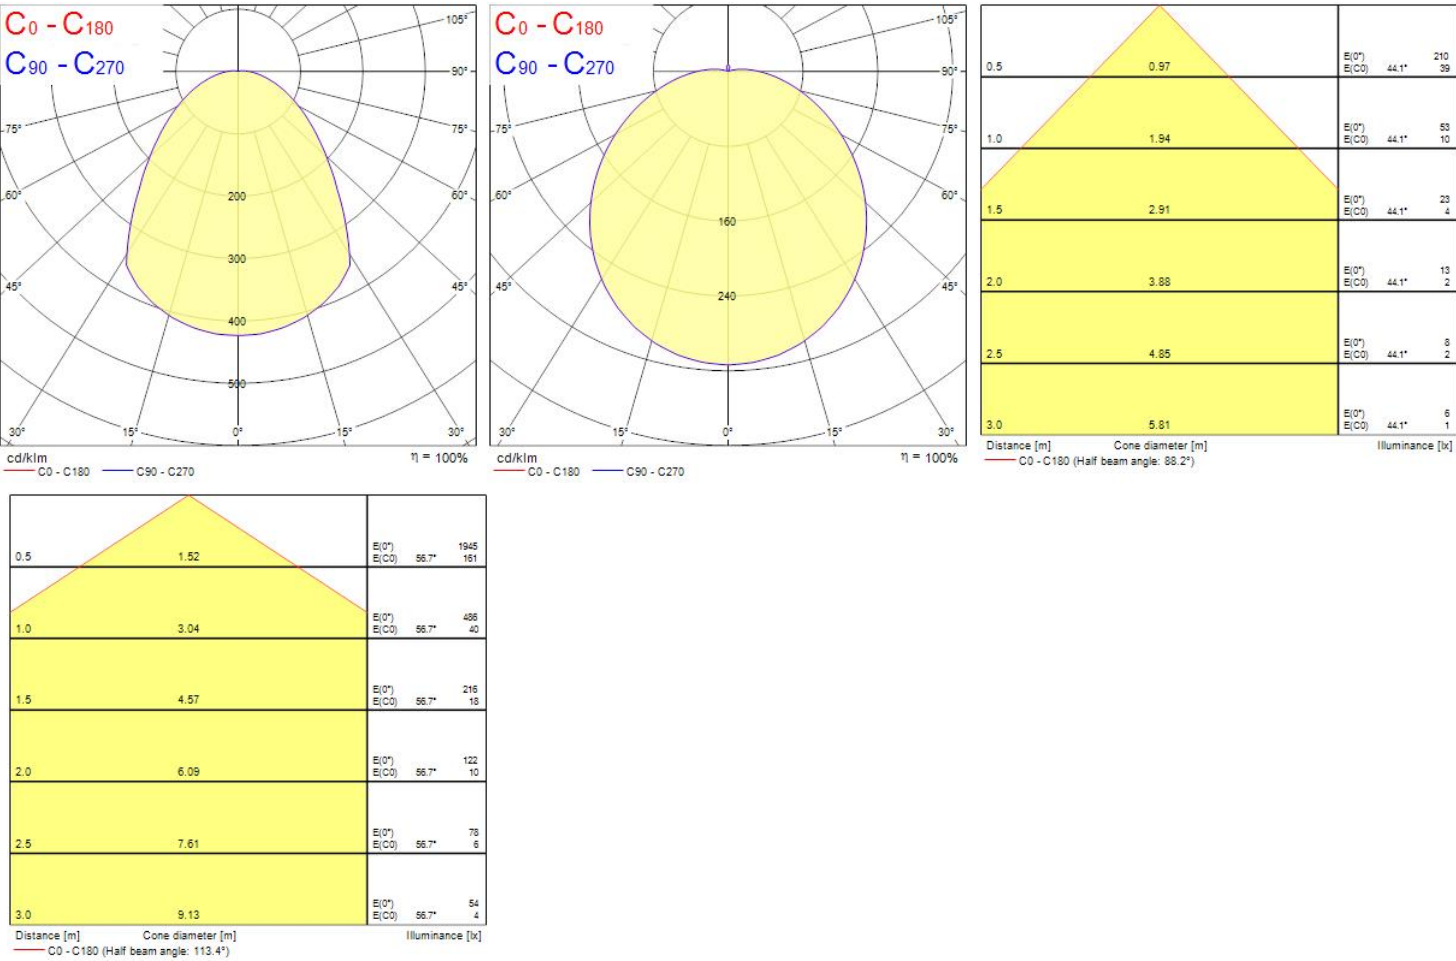

START SURFACE IP66 1500LM 840 EM3 IK10 WHT
0049009

Technical drawings

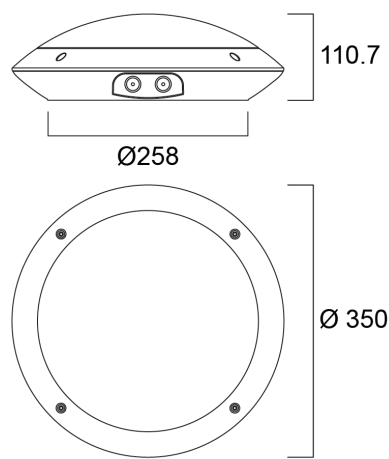

Data table

GENERAL DATA

Product name	START SURFACE IP66 1500LM 840 EM3 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1500
----------------------------	------

START SURFACE IP66 1500LM 840 EM3 IK10 WHT 0049009

Luminaire efficacy (lm/W)	88
LOR (%)	100
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Adjustable chromaticity	N
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70
Luminous flux (emergency) (lm)	124
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	17
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	5
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

START SURFACE IP66 1500LM 840 EM3 IK10 WHT 0049009

LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	90
Max. products per 13A C Breaker	117
Max. products per 16A C Breaker	144
Max. products per 20A C Breaker	180
Max. products per 10A B Breaker	72
Max. products per 13A B Breaker	93
Max. products per 16A B Breaker	115
Max. products per 20A B Breaker	144
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	111
Nominal Product Diameter (mm)	350
Weight (kg)	1.4

PACKAGING

Product EAN number	5410288490090
Packaging single length / height (cm)	40.0
Packaging single width (cm)	40.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05410288490090
Units per outer package	1



START SURFACE IP66 1500LM 840 EM3 IK10 WHT
0049009

Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No