

START Downlight Flat 205 IP44 1550LM 830 DIM  
0054122



Features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1550Lm; 91Lm/W; 3000K; IP44 rated from the front.




Product Overview

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Product name                      | START Downlight Flat 205 IP44 1550LM 830 DIM |
| Technology                        | LED                                          |
| Cap/Base                          | N/A                                          |
| Housing                           | Aluminium                                    |
| Mount                             | Ceiling recessed mounting                    |
| General application               | Hospitality                                  |
| ETIM Class                        | EC001744                                     |
| E-number FI                       | 4278497                                      |
| Fixture luminous flux (lm)        | 1550                                         |
| Luminaire efficacy (lm/W)         | 91                                           |
| Correlated colour temperature (k) | 3000                                         |
| Light colour                      | Warm White                                   |
| CRI (Ra)                          | 80                                           |
| Colour Variation Initial (SDCM)   | 3                                            |
| Beam Angle (°)                    | 120                                          |
| Glare control                     | < 28                                         |
| Photobiological Risk Group        | RG0                                          |
| Total power consumption (W)       | 17                                           |
| Electrical protection             | Class II                                     |
| Control gear type                 | LED driver constant current                  |
| LED Flickering Rate               | Ultra low (5% or less)                       |
| Housing colour                    | RAL9003                                      |

## START Downlight Flat 205 IP44 1550LM 830 DIM 0054122

|                             |                                |
|-----------------------------|--------------------------------|
| IP rating                   | IP44/20                        |
| IK rating                   | IK06                           |
| Product EAN number          | 5410288541228                  |
| Warranty                    | 5 years                        |
| Dimming method              | Mains: leading / trailing edge |
| Useful luminous flux (#use) | 1550                           |

### Photometry

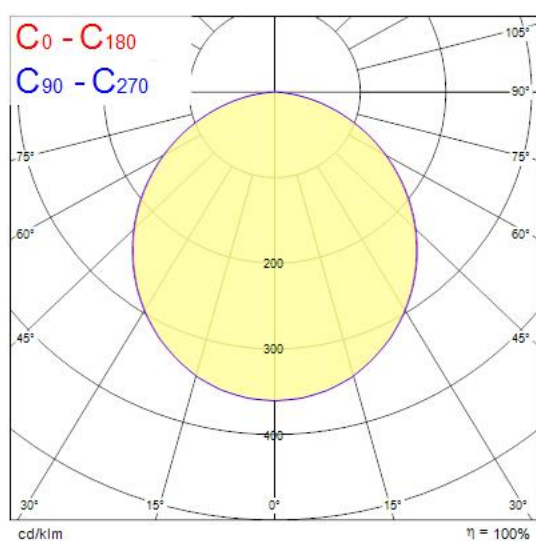

### Technical drawings

