

Features

• Insaвер is a ceiling recessed LED downlight (IP44 from the front),with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1150lm; 121lm/W; 3000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.


Product Overview

Product name	INSAVER U19 IP44 175 1150LM 830 PIR
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278517
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class II
Control gear type	LED driver constant current

INSAVER U19 IP44 175 1150LM 830 PIR
0030518

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305189
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1150

Photometry

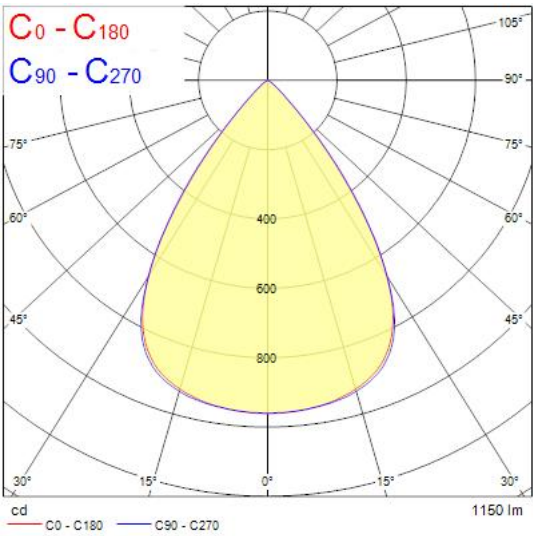

Technical drawings

