


Concord

SOLSTICE 150 3000LM 930 DALI
2070418

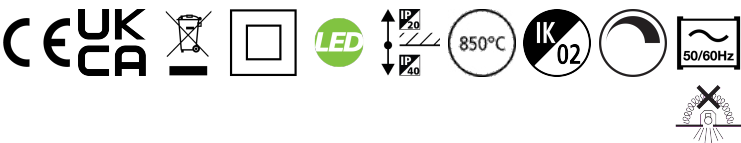

Features

- SOLSTICE 150 3000LM 930 DALI


Product Overview

Product name	SOLSTICE 150 3000LM 930 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	3000
Luminous flux (lm)	3000
Luminaire efficacy (lm/W)	125
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 20
Photobiological Risk Group	RG1

SOLSTICE 150 3000LM 930 DALI 2070418

Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768704187
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	3000

Photometry

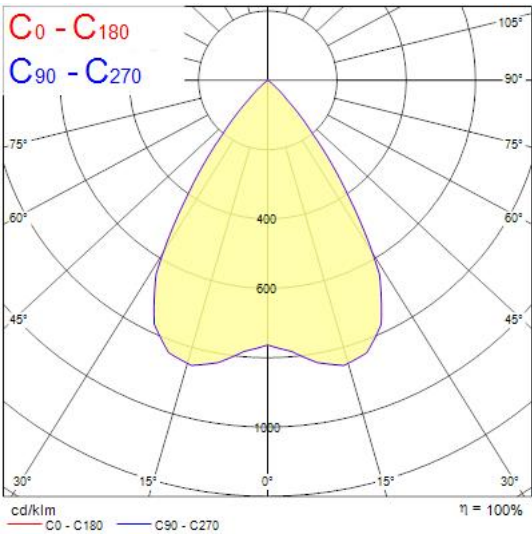

Technical drawings

