

Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x65mm, Constant Current, Low LED flicker (+/-5%), Emergency 3 hours, Neutral White (4000K) LED Colour Temperature, 3100lm, 32W, 97lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


Product Overview

Product name	RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	280
Total power consumption (W)	32

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
0051484


Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514840
Warranty	5 years
Dimming method	N/A

Photometry

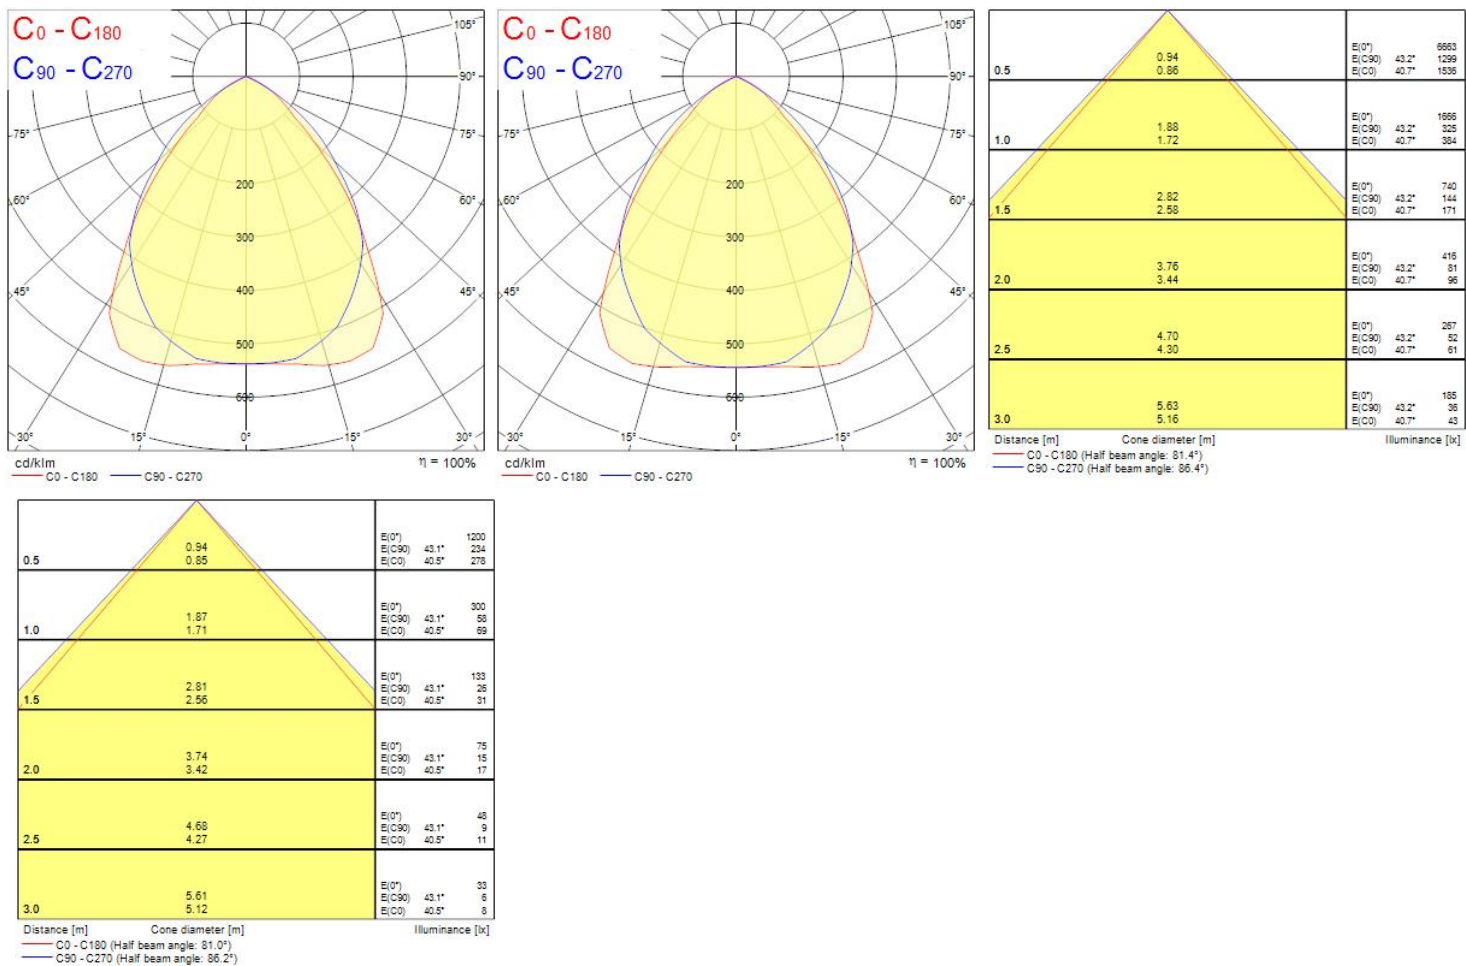

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
0051484

Technical drawings

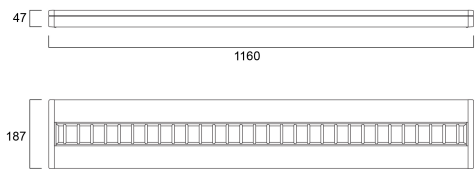

Data table

GENERAL DATA

Product name	RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 19

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2 0051484

Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	280
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (μ s)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 13A C Breaker	36
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	56
Max. products per 10A B Breaker	17
Max. products per 13A B Breaker	22
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	34
Connectable conductor cross section - Min (mm ²)	2.5
Connectable conductor cross section - Max (mm ²)	2.5

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2 0051484

LIFETIME DATA

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	4.1

PACKAGING

Product EAN number	5410288514840
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288514840
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-25



RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
0051484

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No