

Features

- Solstice 200 Lumi HCL TW SSC . Melanopic Ratio / MEER 2700K-0.517, 4000K-0.868, 6500K-1.14


Product Overview

Product name	Solstice 200 Lumi HCL TW SSC01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262091
Fixture luminous flux (lm)	2050
Luminous flux (lm)	2050
Luminaire efficacy (lm/W)	93
LOR (%)	100
Light colour	Tuneable White HCL
CRI (Ra)	95
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG0

Solstice 200 Lumi HCL TW SSC01D 2070164

Total power consumption (W)	22
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701643
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	2050

Photometry

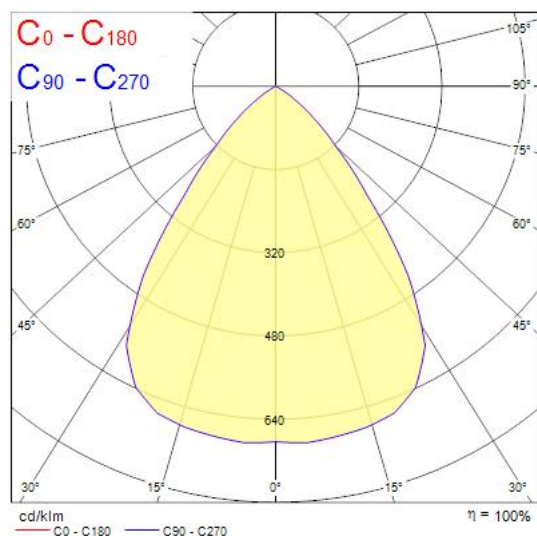

Technical drawings

