

START Downlight 5in1 65-260 2300LM DIM
0053074



Features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 260mm


Product Overview

Product name	START Downlight 5in1 65-260 2300LM DIM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	10

START Downlight 5in1 65-260 2300LM DIM 0053074

LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288530741
Warranty	3 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	2300

Photometry

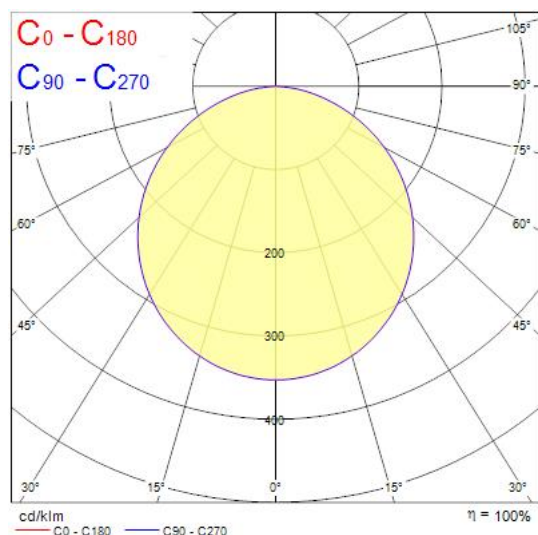

Technical drawings

