


START Surface IP66 900-2950LM 840 IK10 BLK  
0049295

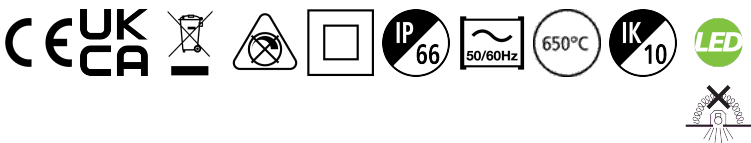

Features

- LED exterior surface mounted luminaire, 350mm diameter, 2950lm as max. lumen output, can be adjusted down to 900lm by internal switch, max 24W power consumption, max 133lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws


Product Overview

|                                   |                                                |
|-----------------------------------|------------------------------------------------|
| Product name                      | START Surface IP66 900-2950LM 840 IK10 BLK     |
| Technology                        | LED                                            |
| Cap/Base                          | N/A                                            |
| Housing                           | PC Polycarbonate                               |
| Mount                             | Ceiling surface mounting, Wall surface mounted |
| Environment                       | Indoor, Outdoor                                |
| General application               | Hospitality                                    |
| ETIM Class                        | EC002892                                       |
| E-number FI                       | 4579596                                        |
| Fixture luminous flux (lm)        | 2950                                           |
| Luminaire efficacy (lm/W)         | 123                                            |
| Correlated colour temperature (k) | 4000                                           |
| Light colour                      | Neutral White                                  |
| CRI (Ra)                          | 80                                             |
| Colour Variation Initial (SDCM)   | 5                                              |
| Photobiological Risk Group        | RG0                                            |
| Total power consumption (W)       | 24                                             |
| Electrical protection             | Class II                                       |
| Control gear type                 | LED driver constant current                    |
| Housing colour                    | RAL9011                                        |

## START Surface IP66 900-2950LM 840 IK10 BLK 0049295

|                             |               |
|-----------------------------|---------------|
| IP rating                   | IP66          |
| IK rating                   | IK10          |
| Product EAN number          | 5410288492957 |
| Warranty                    | 5 years       |
| Dimming method              | N/A           |
| Useful luminous flux (#use) | 2950          |

### Photometry

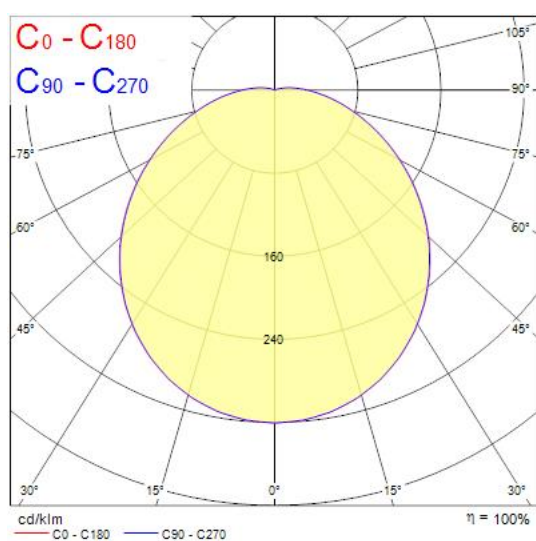

### Technical drawings

