



Features

• MC2 D/I 1.2M 4K DALIEM BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 30W, total fixture output: 4050lm, emergency output: 147lm, luminaire efficacy: 135lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, integral emergency: 3 hour maintained, electrical protection: CLASS I, ingress protection rating: IP20, suitable for internal environment only.


Product Overview

Cap/Base	N/A
Control gear type	Electronic ballast

Concord

MC2 D/I 1.2M 4K DALIEM BLK OPAL
2071559

Photometry

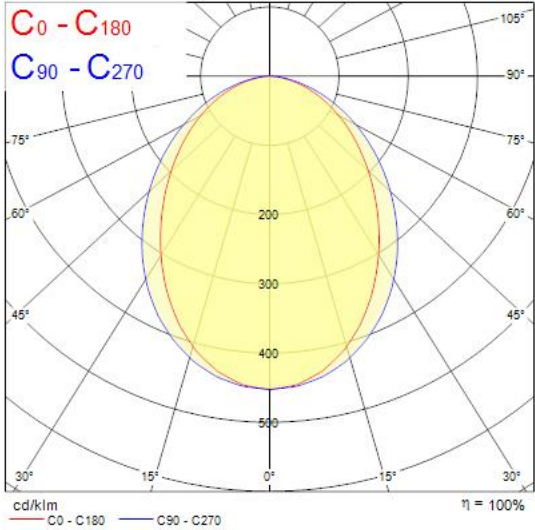

Technical drawings

