



Features

- The Solstice 200 1900lm LUMI 940 SSC is a high efficient SSC dimmable downlight luminaire, Colour rendering index Ra>96, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.Melanopic Ratio /MEER 0.817

Product Overview


Product name	Solstice 200 1900lm LUMI 940 SSC01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262090
Fixture luminous flux (lm)	1900
Luminous flux (lm)	1900
Luminaire efficacy (lm/W)	106
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

Concord

Solstice 200 1900lm LUMI 940 SSC01D 2070163

Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701636
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	1900

Photometry

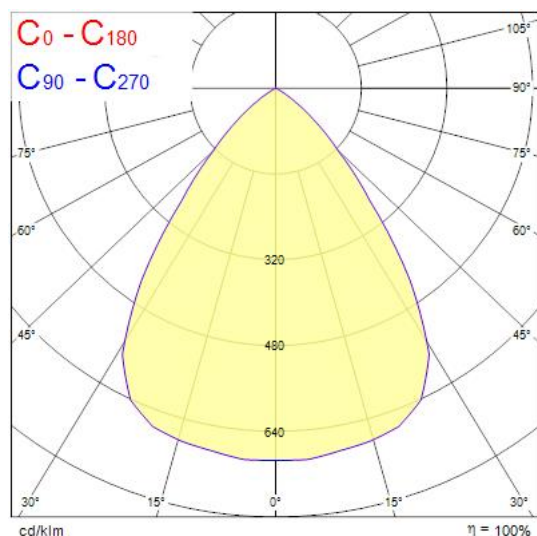

Technical drawings

