

OTAO LINEAR SSA03 MODULE BK
0040812



Features


- SSA sensor module for Otao luminaire, assembled with SSA sensor, DALI PSU & 2pcs of aluminium extrusion for mechanical connection with Otao Linear DALI luminaires. RAL9011 (black) finishing.

Product Overview

Product name	OTAO LINEAR SSA03 MODULE BK
Technology	LED (3 SDCM)
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education
ETIM Class	EC002556
E-number FI	4170666
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Electrical protection	Class III
Housing colour	RAL9011
IP rating	IP20
IK rating	IK03
Product EAN number	5410288408125
Warranty	5 years

OTAO LINEAR SSA03 MODULE BK
0040812

Technical drawings

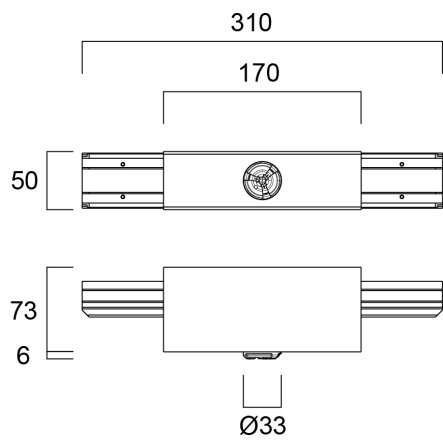

Data table

GENERAL DATA

Product name	OTAO LINEAR SSA03 MODULE BK
Technology	LED (3 SDCM)
Type of accessory	Movement sensor
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002556
E-number FI	4170666
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR SSA03 MODULE BK 0040812

ELECTRICAL DATA

Electrical protection	Class III
Control gear required	No

PHYSICAL DATA

Housing colour	RAL9011
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Nominal Product Length (mm)	170
Nominal Product Width (mm)	50
Nominal Product Height (mm)	73
Weight (kg)	0.45

PACKAGING

Product EAN number	5410288408125
Packaging single length / height (cm)	32.0
Packaging single width (cm)	6.1
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288408122
Units per outer package	5
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	37.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No