

RESISTO 1500 HE IP65 9700LM 840 SSA03L  
0010440



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 9700lm; 60W; 162lm/W; 4000K; SDCM<3; CRI80; IP65; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 89mm x 88mm; D-mark. SylSmart® Connected integration delivers enhanced functionality, enabling comprehensive lighting control and monitoring via an integrated Low Bay Sensor and Bluetooth® NLC


Product Overview

|                                   |                                        |
|-----------------------------------|----------------------------------------|
| Product name                      | RESISTO 1500 HE IP65 9700LM 840 SSA03L |
| Technology                        | LED                                    |
| Cap/Base                          | N/A                                    |
| Housing                           | PC Polycarbonate                       |
| Mount                             | Ceiling surface mounting               |
| General application               | Logistics & Industry                   |
| ETIM Class                        | EC002892                               |
| Fixture luminous flux (lm)        | 9700                                   |
| Luminaire efficacy (lm/W)         | 162                                    |
| Correlated colour temperature (k) | 4000                                   |
| Light colour                      | Neutral White                          |
| CRI (Ra)                          | 80                                     |
| Colour Consistency (SDCM)         | 3                                      |
| Colour Variation Initial (SDCM)   | 3                                      |
| Beam Angle (°)                    | 110                                    |
| Glare control                     | < 25                                   |

RESISTO 1500 HE IP65 9700LM 840 SSA03L  
0010440


|                             |                             |
|-----------------------------|-----------------------------|
| Photobiological Risk Group  | RG1                         |
| Total power consumption (W) | 60                          |
| Electrical protection       | Class I                     |
| Control gear type           | LED driver constant current |
| Dimmable                    | Yes                         |
| Minimum dimming level (%)   | 1                           |
| Housing colour              | Grey                        |
| IP rating                   | IP65                        |
| IK rating                   | IK08                        |
| Product EAN number          | 5410288104409               |
| Warranty                    | 5 years                     |
| Dimming method              | SylSmart SSA                |

Photometry

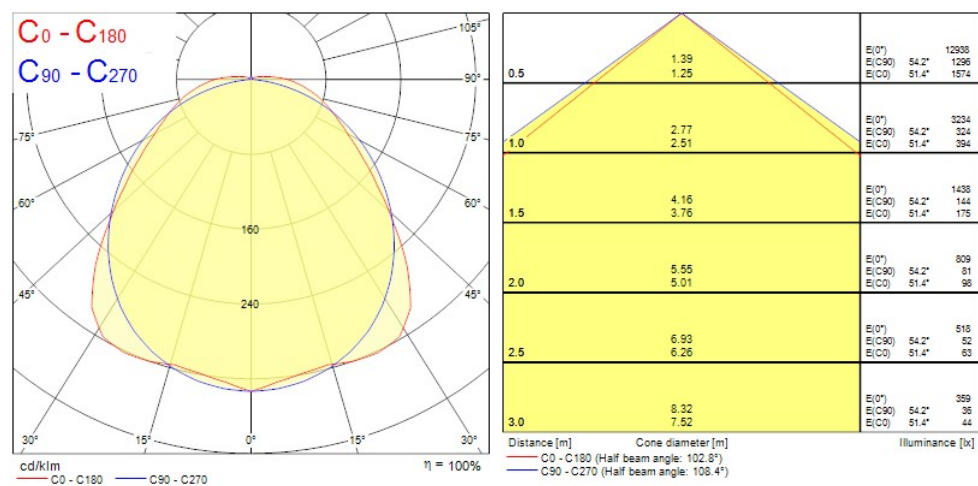

RESISTO 1500 HE IP65 9700LM 840 SSA03L  
0010440

Technical drawings

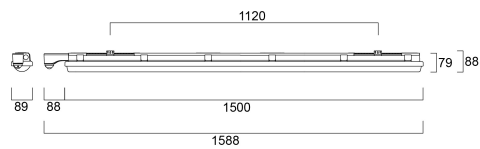

Data table

GENERAL DATA

|                                         |                                        |
|-----------------------------------------|----------------------------------------|
| Product name                            | RESISTO 1500 HE IP65 9700LM 840 SSA03L |
| Technology                              | LED                                    |
| Cap/Base                                | N/A                                    |
| Housing                                 | PC Polycarbonate                       |
| Mount                                   | Ceiling surface mounting               |
| General application                     | Logistics & Industry                   |
| Operating temperature range (°C)        | -20°C...+40°C                          |
| Performance ambient temperature Tq (°C) | 25                                     |
| ETIM Class                              | EC002892                               |
| Warranty                                | 5 years                                |

OPTICAL DATA

|                                   |               |
|-----------------------------------|---------------|
| Fixture luminous flux (lm)        | 9700          |
| Luminaire efficacy (lm/W)         | 162           |
| Correlated colour temperature (k) | 4000          |
| Light colour                      | Neutral White |
| CRI (Ra)                          | 80            |
| Colour Variation Initial (SDCM)   | 3             |
| Colour Consistency (SDCM)         | 3             |
| Beam Angle (°)                    | 110           |

## RESISTO 1500 HE IP65 9700LM 840 SSA03L 0010440

|                            |         |
|----------------------------|---------|
| Distribution type          | Diffuse |
| Glare control              | < 25    |
| Photobiological Risk Group | RG1     |

### ELECTRICAL DATA

|                                                                       |                             |
|-----------------------------------------------------------------------|-----------------------------|
| Total power consumption (W)                                           | 60                          |
| Primary Supply/Product voltage - min (V)                              | 220.0                       |
| Primary Supply/Product voltage - max (V)                              | 240.0                       |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x % | 20                          |
| Electrical protection                                                 | Class I                     |
| Control gear required                                                 | No                          |
| Control gear type                                                     | LED driver constant current |
| No. Of switching cycles before premature failures                     | >50000                      |
| Dimmable                                                              | Yes                         |
| Dimming method                                                        | SylSmart SSA                |
| Minimum dimming level (%)                                             | 1                           |
| Drive current (mA)                                                    | 350                         |
| Inrush Current (A)                                                    | 16                          |
| Inrush Duration ( $\mu$ s)                                            | 40                          |
| Energy Efficiency Class (A->G) of contained light source              | C                           |
| Nominal Frequency (Hz)                                                | 50/60Hz                     |
| Max. products per 10A C Breaker                                       | 24                          |
| Max. products per 16A C Breaker                                       | 39                          |
| Max. products per 16A B Breaker                                       | 39                          |
| Connectable conductor cross section - Max (mm <sup>2</sup> )          | 2.5                         |

### LIFETIME DATA

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
|------------------|--------|

### PHYSICAL DATA

## RESISTO 1500 HE IP65 9700LM 840 SSA03L 0010440

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Grey             |
| IP rating                   | IP65             |
| IK rating                   | IK08             |
| Diffuser finish             | Frosted          |
| Diffuser material           | PC Polycarbonate |
| Nominal Product Length (mm) | 1588             |
| Nominal Product Width (mm)  | 87               |
| Nominal Product Height (mm) | 80               |
| Weight (kg)                 | 2.29             |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288104409  |
| Packaging single length / height (cm) | 150.5          |
| Packaging single width (cm)           | 10.0           |
| Packaging single depth (cm)           | 8.5            |
| DUN14 (inner)                         | 05410288104409 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 150.5          |
| Packaging outer width (cm)            | 10.0           |
| Packaging outer depth (cm)            | 8.5            |

### SAFETY DATA

|                                     |        |
|-------------------------------------|--------|
| Glow Wire Test (°C)                 | 850    |
| Optimal operating condition (°C)    | -20-40 |
| Special purpose lamp                | No     |
| Dry applications use only           | No     |
| Suitable for household illumination | No     |