


START Waterproof Slim 600 IP66 1400/2550lm 840
0046425

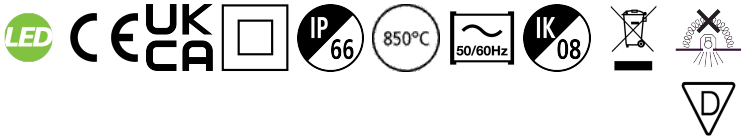

Features

- START Waterproof Slim is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 2550 / 1400lm (selected by DIP switch), 18.5 / 10.5W, 138 / 133lm/W and 100,000 hours lifespan L70B50. SDCM < 5; IP66; IK08; Class II; 640mm x 70mm x 73mm.


Product Overview

Product name	START Waterproof Slim 600 IP66 1400/2550lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357159
Fixture luminous flux (lm)	2550
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	18.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes with restrictions

START Waterproof Slim 600 IP66 1400/2550lm 840
0046425

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL7035
IP rating	IP66
IK rating	IK08
Product EAN number	5410288464251
Warranty	5 years
Dimming method	Other

Photometry

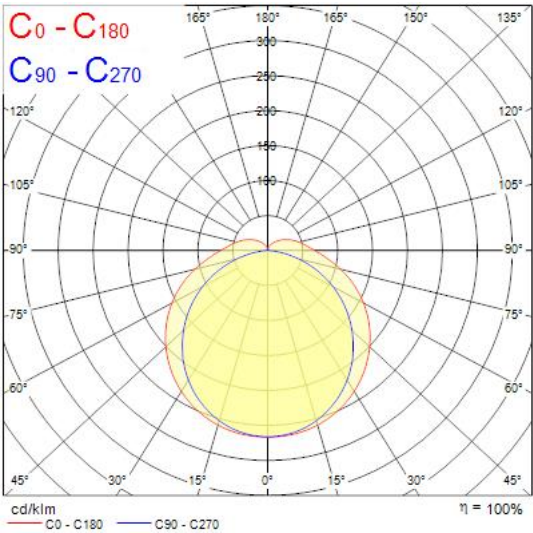

Technical drawings

