


Concord

MC2 0.6M 4K DALI WHT OPAL 2093158

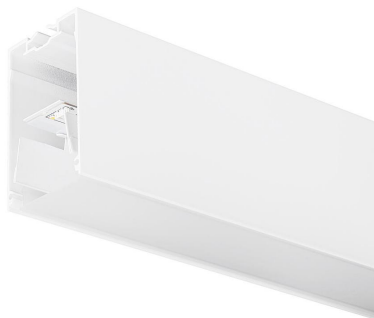

Features

• 2093158 MC2 0.6M 4K DALI WHT OPAL Continuous lines of LED light, white RAL 9016, direct distribution, extension module, trimless detail for a seamless finish, suitable for recessed, semi-recessed, surface-mounted or suspended installation either horizontally or vertically, various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 10W, total fixture output: 1150lm, luminaire efficacy: 115lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 400mA, electronic driver, DALI dimmable, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview


Product name	MC2 0.6M 4K DALI WHT OPAL
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4237848
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	115
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White

Concord

MC2 0.6M 4K DALI WHT OPAL 2093158

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 17
Photobiological Risk Group	RG0
Total power consumption (W)	10
Electrical protection	Class I
Control gear type	Electronic ballast
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768931583
Warranty	5 years
Dimming method	DALI

Photometry

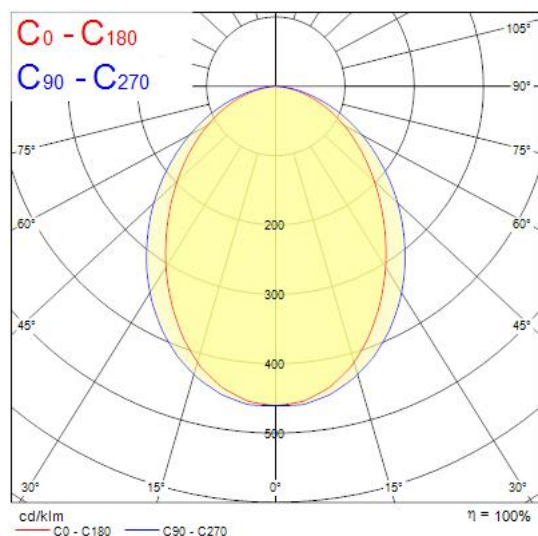

Technical drawings

