



Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 4000K, CRI80, DALI dimmable, 16300lm, 102W, 160lm/W, Symmetrical Wide beam, 100.000hrs L80B50 lifespan, 405 x 320 x73mm (LxWxD) dimensions, 4.3kg weight, RAL9017 Traffic Black color, Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3.


Product Overview

Product name	Kalani IP66 14KLM 840 WB DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579656
Fixture luminous flux (lm)	16300
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	102
Electrical protection	Class I
Control gear type	LED driver constant current

Kalani IP66 14KLM 840 WB DALI
0056820

Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9017
IP rating	IP66
IK rating	IK08
Product EAN number	5410288568201
Warranty	5 years
Dimming method	DALI-2

Photometry

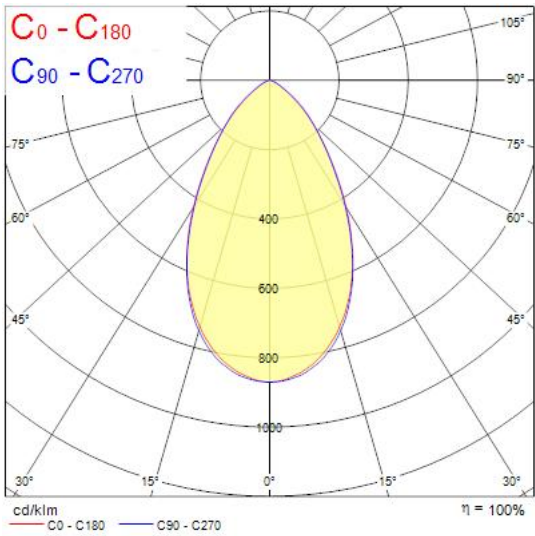

Technical drawings

