



PRO

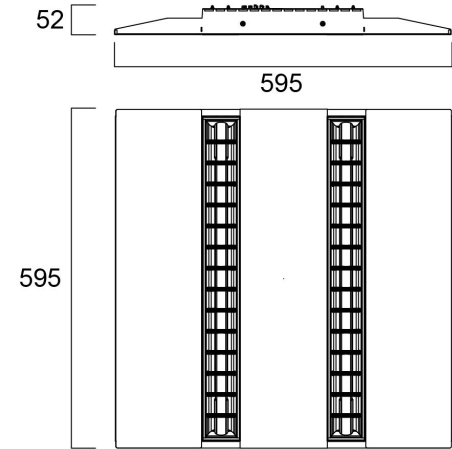

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.89 0.67	67°	67°	67°	8574
1.0	1.78 1.33	67°	67°	67°	2143
1.5	2.66 2.00	67°	67°	67°	932
2.0	3.55 2.67	67°	67°	67°	554
2.5	4.44 3.33	67°	67°	67°	443
3.0	5.33 4.00	67°	67°	67°	370

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 67.4°)
C90 - C270 (Half beam angle: 33.2°)





|