


PRO

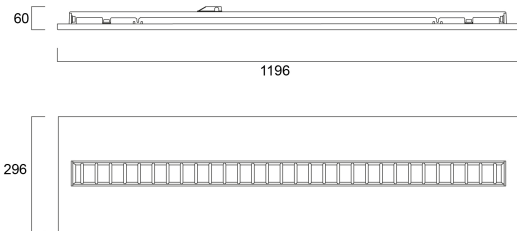

Distance [m]	Cone diameter [m]	E171	E150	E120	E100	E80	E60	E40	E20
0.5	0.96 0.86	615	116	143					
1.0	1.92 1.72	159	28	36					
1.5	2.88 2.58	67	12	15					
2.0	3.84 3.44	30	7	9					
2.5	4.81 4.30	24	6	8					
3.0	5.77 5.16	17	5	7					

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 91.4°)
 — C90 - C270 (Half beam angle: 87.8°)

