



PRO



Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.96 0.91	50° 50°	43.7" 42.2"	12362 2086
1.0	1.91 1.81	50° 50°	43.7" 42.2"	3073 673
1.5	2.87 2.72	50° 50°	43.7" 42.2"	1366 263
2.0	3.82 3.63	50° 50°	43.7" 42.2"	786 147
2.5	4.78 4.53	50° 50°	43.7" 42.2"	482 94
3.0	5.73 5.44	50° 50°	43.7" 42.2"	341 66

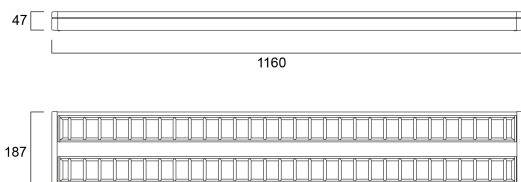



|