



PRO



Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.91 0.69	60° 42°	0.91 0.69	3.0 2.3	5000 1000
1.0	1.83 1.38	60° 42°	1.83 1.38	6.0 4.6	2500 1000
1.5	2.74 2.07	60° 42°	2.74 2.07	9.0 6.9	1667 667
2.0	3.65 2.76	60° 42°	3.65 2.76	12.0 9.1	1000 400
2.5	4.57 3.46	60° 42°	4.57 3.46	15.0 11.3	667 267
3.0	5.48 4.14	60° 42°	5.48 4.14	18.0 13.6	444 178

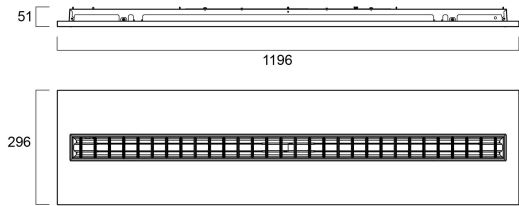



|