
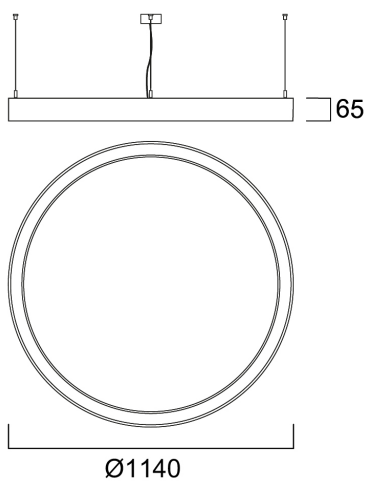



Concord

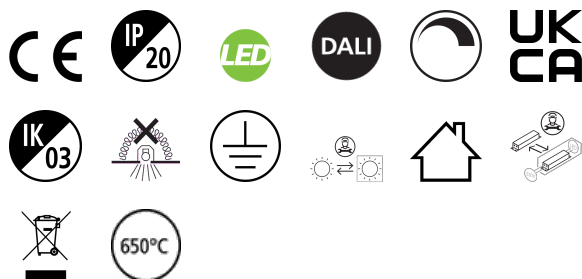

0.5	1.35	50°	1540
	1.35	50°	1078
1.0	2.72	50°	386
	2.69	50°	269
1.5	4.08	50°	167
	4.04	50°	120
2.0	5.45	50°	94
	5.39	50°	67
2.5	6.81	50°	48
	6.73	50°	35
3.0	8.17	50°	30
	8.06	50°	22

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 106.8°)
— C90 - C270 (Half beam angle: 107.4°)





Concord



