


**SCHUKO Socket USB**  
**Alu**

Product Data Sheet

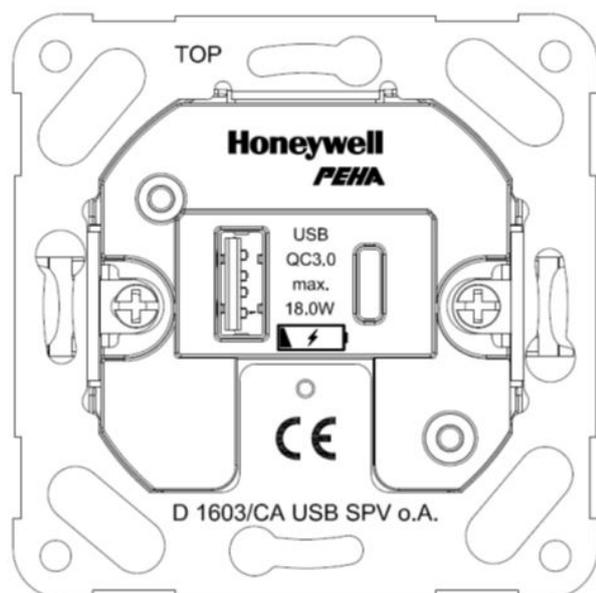

Halogen free	Yes
Transparent	No
Model	Other
Mounting method	Flush mounted (plaster)
Material	Plastic
Colour	Aluminium
Type of fastening	Mounting with screw
MP3	no
radio link	no
[CC00001_2]	70Millimetre
[CC00001_3]	70Millimetre
[CC00180_2]	30Millimetre

**SCHUKO Socket USB**  
**Alu**

SCHUKO socket with USB charger 3.4A, USB type A + C (QC3.0) 2-pole, 16A 250 V ~, with connection terminals according to VDE 0620, with central plate for combinations, with 2 USB ports type A and type C for supplying and charging mobile devices. Technical specifications  
Nominal voltage: AC 220... 250 V ~ Mains frequency: 50/60 Hz Rated current socket: 16 A. Output current USB (total): 3.4 A USB type A operation (without USB type C): USB output voltage DC 5V, charging current max.3A (max.15W) USB type C (QC3.0) operation (without USB type A): USB output voltage DC 9V, charging current max.2A (max.18W) USB output voltage DC 12V, charging current max.1.5A (max.18W) USB type A + C (parallel operation): USB output voltage DC 12V, charging current max.3.4A (max.17W) with charge current monitoring Connection type: plug-in terminal Single wire: 1.5... 2.5 mm<sup>2</sup> Use of deep flush-mounted boxes recommended

Material No.	Article No.	EAN-code
00318212	D 11.6511.70 SI USB CA	4010105318210

**PEHA Elektro GmbH & Co.KG**

a Honeywell Company  
Daimlerstraße 4  
58553 HALVER  
DEUTSCHLAND

Tel.: 02353 9118 001  
Fax: 02353 9118 311  
mail: [peha@honeywell.com](mailto:peha@honeywell.com)  
[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA