


Dichtung für Installationssteckdosen
Seal for installation socket-outlets



Gewicht
/ Weight 2 g



Beschreibung / Description

Passend für Typen:
 486, 496, 496K, 496R, 496KR, 497, 497K, 497R
 und 497KR.


Suitable for types:

486, 496, 496K, 496R, 496KR, 497, 497K, 497R
 und 497KR.

Technische Daten / Specifications

Nennspannung / Rated voltage	—
Nennstrom / Rated current	—
Bauart / Kind of construction	—
Anschlüsse / Type of terminals	—
Kontakte / Material of terminals	—
Kontaktträger / Carrying parts	—
Gehäuse / Cover	Polyvinylchlorid (PVC) / Polyvinylchloride (PVC)
Umgebungstemperatur / Ambient temperature	—
Schutzart / Degree of protection	—

Abmessungen / Dimensions

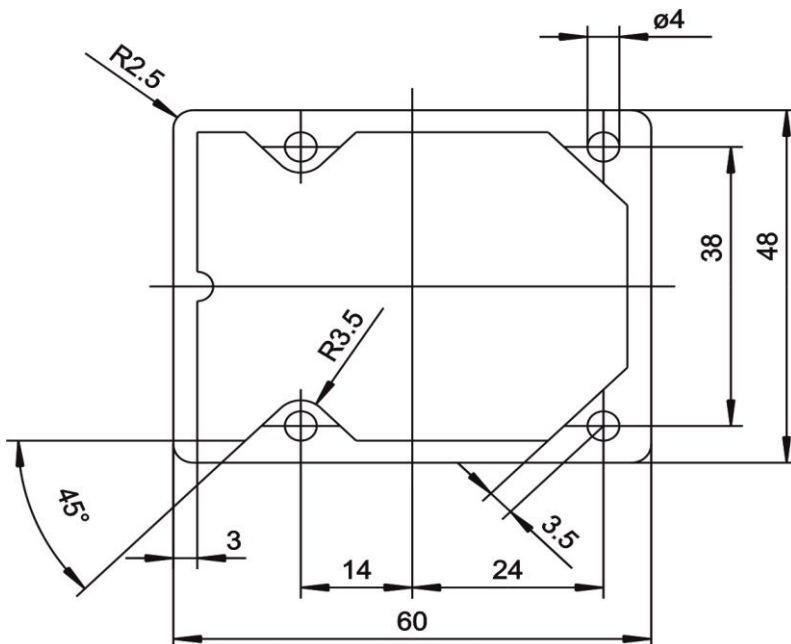

Abisolierung / Wire stripping :

N	L	PE
—	—	—

Revision: A
 vom 11.12.2020