

PRODUCT DATASHEET

ST CLAS B 25 3.3 W/2700 K E14

LED STAR CLASSIC B | LED lamps, classic mini-candle shape



Areas of application

- Domestic applications
- General illumination
- Chandeliers
- Outdoor use in suitable outdoor luminaires only

Product benefits

- Low energy consumption
- Easy replacement of classic lamps thanks to compact design
- Instant 100 % light, no warm-up time

Product features

- LED alternative to conventional lamps
- Mercury-free lamps



TECHNICAL DATA

Electrical data

Nominal wattage	3.3 W
Construction wattage	3.30 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	25 W
Nominal current	28 mA
Type of current	AC
Inrush current	1.4 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	766
Max. lamp no. on circuit break. 16 A (B)	1226
Power factor λ	> 0.50


Photometrical data

Luminous flux	250 lm
Nominal useful luminous flux 90°	250 lm
Luminous efficacy	75 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥80
Light color	827
Standard deviation of color matching	≤6 sdcn
Rated LLMF at 6,000 h	0.80

Light technical data

Beam angle	220 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	220.00 °

Dimensions & Weight

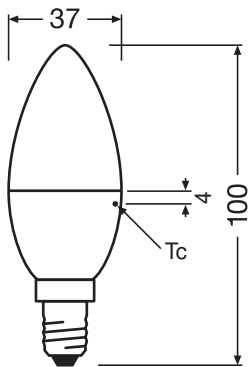

Overall length	100.00 mm
Diameter	37.00 mm
Maximum diameter	35 mm
Product weight	18.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	66 °C


Lifespan

Lifespan	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities



Dimmable	No
----------	----

Certificates & Standards

Energy efficiency class	A+ ¹⁾
Energy consumption	3.00 kWh/1000h
Type of protection	IP20
Standards	CE
Photobiological safety group acc. to EN62778	RG0

¹⁾ Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)

Country-specific categorizations

Order reference	LEDSCLB25 3,3W/
-----------------	-----------------

Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	E14
Length	100.00 mm
Height	37.00 mm
Width	37.00 mm

DOWNLOAD DATA

DOWNLOAD DATA	
	PRODUCT DATASHEET
	PRODUCT DATASHEET

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075127753	Blister 1	42 mm x 140 mm x 120 mm	33.00 g	0.71 dm ³
4058075127760	Shipping box 6	262 mm x 153 mm x 132 mm	306.00 g	5.29 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links



- For further products and actual information concerning LED lamps see www.ledvance.com/ledlamps
- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

