

PRODUCT DATASHEET

LUNETTA Shine White

LUNETTA® Shine | Socket nightlight with warm white light and daylight sensor



Areas of application

- Children's bedrooms
- Decorative domestic lighting
- For indoor use only

Product benefits

- Attractive and functional design
- Plug and Play due to EU Plug
- Automatically switches on and off according to the amount of available daylight

Product features

- Integrated day/night sensor
- Direct connection to a 220...240 V AC supply



TECHNICAL DATA

Electrical data


Nominal wattage	0.28 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	24.000 mA
Max. no. of lum. on circuit break. B16 A	-
Max. no. of lum. on circuit break. C10 A	-
Max. no. of lum. on circuit break. C16 A	-
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	5 lm
Luminous efficacy	18 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0

Dimensions & Weight

Length	60.00 mm
Width	60.00 mm
Height	90.00 mm
Product weight	40.00 g

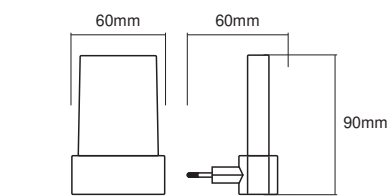

Materials & Colors



Product color	White
Housing color	White
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Plug type C (EU)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Mounting location	Socket
Application environment	Indoor
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	10000

Certificates & Standards

Standards	CE / EAC / REACH / RoHS
-----------	-------------------------

DOWNLOAD DATA

DOWNLOAD DATA	
	Tender documents
	Declarations of conformity
	Packaging insert

LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075266889	Blister 1	62 mm x 140 mm x 195 mm	59.00 g	1.69 dm ³
4058075266896	Shipping box 6	385 mm x 154 mm x 210 mm	528.00 g	12.45 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

