

ToLEDo Superia T8 UNIVERSAL
ToLEDo Superia T8 Universal V3 5FT 3600LM 865
0029278



Product features

- 50,000 hours average rated lifeLast 2.5 times longer than 1500mm 58W fluorescent T8 Tri-phosphor lampHigh switching cycles - 200,000XHigh lumen efficacy - 157lm/WOmni-directional light distribution and wide beam angleMinimum and maximum operating temperature: -20°C to 50°CGlass construction and polycarbonate end-capsWorks only with compatible electronic ballastMust replace the fluorescent starter with LED dummy starter when used with magnetic/ CCG ballastSuitable for direct mains operation (AC 220-240V) with single-end AC inputIdeal for factories, parking lots, supermarkets, department stores, schools and offices



PRODUCT OVERVIEW

Product name	ToLEDo Superia T8 Universal V3 5FT 3600LM 865
Technology	LED
Watt (Rated) (W)	23
Lamp shape	Tube, double-ended
Type	LED exchangeable
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4940799
Warranty	5 years
Luminous flux (lm)	3600
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Wattage (W)	23
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000
IP rating	IP20
Product EAN number	5410288292786

DATA TABLE

General data	
Product name	ToLEDo Superia T8 Universal V3 5FT 3600LM 865
Technology	LED
Watt (Rated) (W)	23
Lamp shape	Tube, double-ended
Type	LED exchangeable

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 5FT 3600LM 865

0029278

Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4940799
Warranty	5 years

Optical data

Luminous flux (lm)	3600
Luminous flux (Rated) (lm)	3600
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	23
Product Voltage (V)	230
Lamp power factor	0.9
Control gear required	No
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Inrush Current (A)	13.7
Inrush Duration (µs)	84
Lamp Energy Label (class)	D
Max. Luminaires per 16A C Breaker	35
Max. Luminaires per 16A B Breaker	55

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

IP rating	IP20
Nominal Product Length (mm)	1514
Nominal Product Diameter (mm)	28
Weight (kg)	0.2

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 5FT 3600LM 865

0029278


Packaging

Single packaging type	Carton
Product EAN number	5410288292786
Packaging single length / height (cm)	151.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288292783
Units per outer package	10
Packaging outer length / height (cm)	150.7
Packaging outer width (cm)	21.0
Packaging outer depth (cm)	11.5


Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	None

PHOTOMETRY

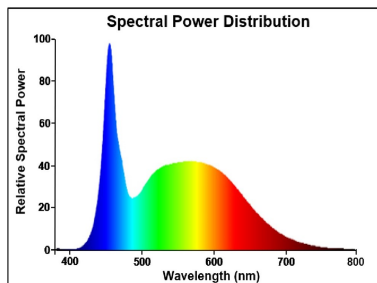

TECHNICAL DRAWINGS




ToLEDo Superia T8 UNIVERSAL
ToLEDo Superia T8 Universal V3 5FT 3600LM 865
0029278

**ENERG**

SYLVANIA

0029278

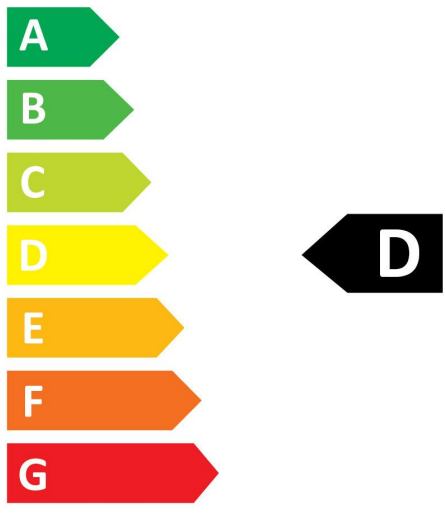


23
kWh/1000h



ToLEDo Superia T8 UNIVERSAL
ToLEDo Superia T8 Universal V3 5FT 3600LM 865
0029278



0029278

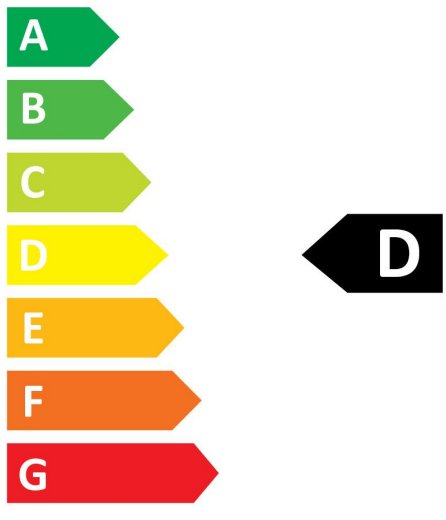

23
kWh/1000h



2019/2015