

Resisto Throughwiring
Resisto 1200 IP66 DALI 5000lm 840 5xTH
0010285



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; through wiring.



PRODUCT OVERVIEW

Product name	Resisto 1200 IP66 DALI 5000lm 840 5xTH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	139
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102856

DATA TABLE

General data

Product name	Resisto 1200 IP66 DALI 5000lm 840 5xTH
--------------	--

Resisto Throughwiring

Resisto 1200 IP66 DALI 5000lm 840 5xTH
0010285

Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	139
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13

Resisto Throughwiring

Resisto 1200 IP66 DALI 5000lm 840 5xTH
0010285

Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

Lifetime data

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	74000
Lifespan L80 B20	69000
Lifespan L80 B10	66000
Lifespan L90 B50	35000
Lifespan L90 B20	33000
Lifespan L90 B10	31000

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.8

Packaging

Single packaging type	Carton
Product EAN number	5410288102856
Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	05410288102856
Units per outer package	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

Resisto Throughwiring

Resisto 1200 IP66 DALI 5000lm 840 5xTH
0010285

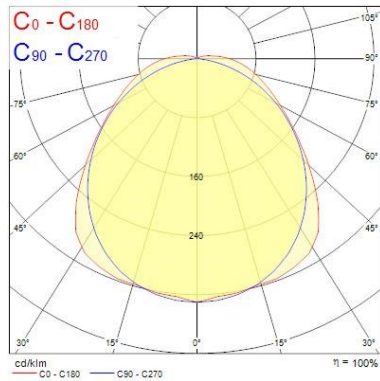

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.32 1.35	5000 5200 5300
1.0	2.63 2.69	1250 1300 1350
1.5	3.95 4.04	667 700 733
2.0	5.27 5.39	417 433 450
2.5	6.59 6.73	267 280 293
3.0	7.90 8.08	167 173 180

TECHNICAL DRAWINGS

