

ToLEDo G4
ToLEDo G4 220LM 865 SL
0029657



- Product features**
- LED retrofit replacement for halogen G4 low voltage capsules
 - Compact design
 - Omni-directional light distribution
 - 12V AC/DC
 - 200lm = 20W halogen G4 lamp
 - High lumen efficacy: 116lm/W
 - 90% energy saving
 - Non-dimmable
 - Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications



PRODUCT OVERVIEW

Product name	ToLEDo G4 220LM 865 SL
Technology	LED
Watt (Rated) (W)	1.9
Type	LED exchangeable
Cap/Base	G4
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741128
Warranty	3 years
Luminous flux (lm)	220
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	1.9
Product Voltage (V)	12
Dimmable	No

ToLEDo G4

ToLEDo G4 220LM 865 SL

0029657

Average life (Nominal) (h)	15000
Product EAN number	5410288296579

DATA TABLE

General data

Product name	ToLEDo G4 220LM 865 SL
Technology	LED
Watt (Rated) (W)	1.9
Type	LED exchangeable
Cap/Base	G4
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC001959
E-number FI	4741128
Warranty	3 years

Optical data

Luminous flux (lm)	220
Luminous flux (Rated) (lm)	220
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	1.9
Equivalent watt (W)	20
Product Voltage (V)	12
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	Yes
Dimmable	No
Inrush Current (A)	4.2
Inrush Duration (µs)	1700
Lamp Energy Label (class)	F
Max. Luminaires per 16A C Breaker	38
Max. Luminaires per 16A B Breaker	19

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000

ToLEDo G4

ToLEDo G4 220LM 865 SL

0029657

Average life (Rated) (h)	15000
--------------------------	-------

Physical data

Nominal Product Length (mm)	45
Nominal Product Diameter (mm)	16
Weight (kg)	0.007


Packaging

Single packaging type	Carton
Product EAN number	5410288296579
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (outer)	15410288296576
Units per outer package	6
Packaging outer length / height (cm)	16.5
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	9.0

Safety data


Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Suitable for approved transf./dimmers

PHOTOMETRY

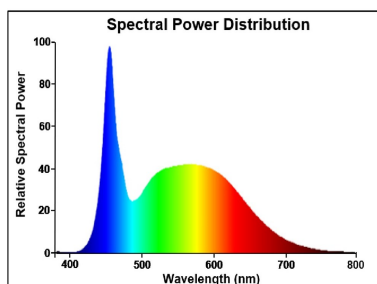


TECHNICAL DRAWINGS

ToLEDo G4
ToLEDo G4 220LM 865 SL
0029657



0029657

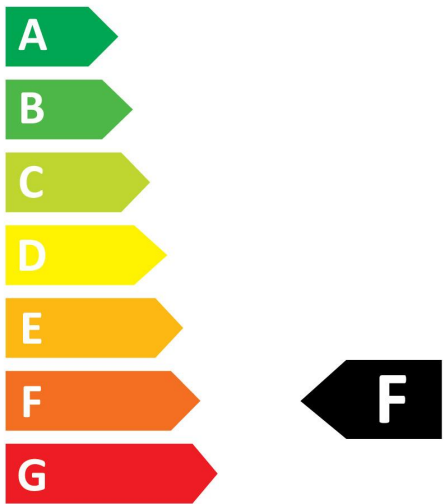

2
kWh/1000h




2019/2015

ToLEDo G4
ToLEDo G4 220LM 865 SL
0029657



ENERGY
SYLVANIA

0029657

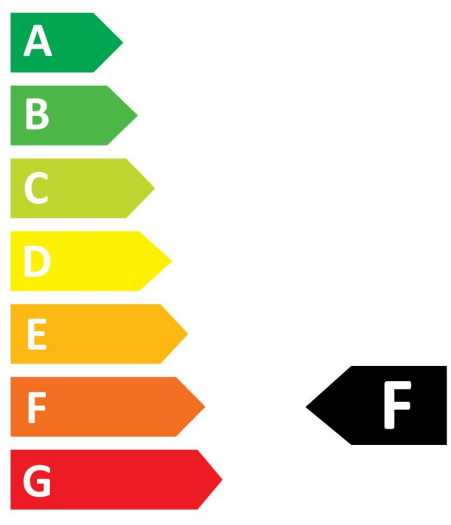

2
kWh/1000h

